

NuWaves

RF Solutions

NuPower™ 12B01A L- & S-Band Solid State Power Amplifier

18 Watt CW
2.5 Watts Linear, 5% EVM @ 34 dBm
1.0 GHz - 2.5 GHz

P/N: NW-PA-12B01A



The NuPower™ 12B01A is a small, highly efficient solid state power amplifier that provides 18 watts (typ) of RF power to boost performance of data links and transmitters.

Based on the latest gallium nitride (GaN) technology, NuPower's 30% - 50% power efficiency and 3.9 in³ form factor make it ideal for size, weight, and power-constrained broadband RF telemetry and tactical communication systems.

The NuPower 12B01A power amplifier accepts a nominal 0 dBm RF input and provides over 40 dB of gain from 1.0 GHz to 2.5 GHz. The NuPower 12B01A module comes with an optional NW-PA-ACC-CB09MA interface cable, for ease of integration. This model is also available with a 1 watt input drive level (P/N: NW-PA-12B01A-D30), making it ideal for use with L-3 Communications' Bandit miniature L- and S-band transceiver.

NuPower PAs feature over-voltage and reverse-voltage protection and can operate over a wide temperature range of -30 °C to +60 °C.

Extend your operational communication range with NuPower™ amplifiers from NuWaves RF Solutions.

Features

- 18 Watts RF Output Power
- 1.0 GHz to 2.5 GHz
- Miniature Package (3.00" x 2.00" x 0.65")
- High-Efficiency GaN Technology
- 0 dBm Nominal RF Input
- Reverse-Voltage Protection
- Logic On/Off Control

Benefits

- Extended Range
- Improved Link Margin
- Reduced load on DC power budget due to high efficiency operation
- Requires less volume on space-constrained platforms

Applications

- Unmanned Aircraft Systems (UAS), Group 2 & 3
- Unmanned Ground Vehicles (UGV)
- Broadband RF Telemetry
- RF Communication Systems
- Software Defined Radios

NuPower™ 12B01A Power Amplifier

Specifications

Absolute Maximums

Parameter	Rating	Unit
Max Device Voltage	32	V
Max Device Current	2.4	A
Max RF Input Power, $Z_L = 50 \Omega$	10	dBm
Max Operating Temperature (ambient)	60	°C
Max Operating Temperature (baseplate)	85	°C
Max Storage Temperature	85	°C

Export Classification
EAR99

Electrical Specifications @ 28VDC, 25 °C, $Z_S=Z_L=50 \Omega$

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Operating Frequency	BW	1000		2500	MHz	
RF Output Power	P_{SAT}	10	18	23	W	$P_{in} = 0$ dBm
Output Power @ 1dB Compression	P1dB		31		dBm	1.0 GHz
			31			1.5 GHz
			36			2.0 GHz
			38			2.5 GHz
Small Signal Gain	G		50		dB	1.0 GHz, @ -30 dBm input
			49			1.5 GHz, @ -30 dBm input
			47			2.0 GHz, @ -30 dBm input
			46			2.5 GHz, @ -30 dBm input
Small Signal Gain Flatness	ΔG		± 3		dB	$P_{in} = -30$ dBm
Power Gain Flatness			± 1		dB	$P_{in} = 0$ dBm
Input VSWR	VSWR	1.1:1	1.8:1	3.5:1		
Nominal Input Drive Level	P_{IN}		0		dBm	
Operating Voltage	VDC	11	28	32	V	
Quiescent Current	I_{DQ}		0.35		A	
Operating Current	I_{DD}	1.5	1.9	2.1	A	$P_{in} = 0$ dBm
Module Efficiency		27	35	42	%	$P_{in} = 0$ dBm
Switching Speed	$T_{XON/OFF}$			2	μS	10% to 90%
Third Order Intercept Point (Two tone test at 1 MHz spacing, $P_{out} = 20$ dBm / tone)	OIP3		42		dBm	1.0 GHz
			42			1.5 GHz
			39			2.0 GHz
			41			2.5 GHz
Harmonics	2nd	-46	-21	-8	dBc	
	3rd	-35	-24	-11		
Output Mismatch w/o Damage				10:1		

NuPower™ 12B01A Power Amplifier

Specifications (cont.)

Mechanical Specifications

Parameter	Value	Unit	Limits
Dimensions	3.0 x 2.0 x 0.65	in	Max
Weight	3	oz	Max
RF Connectors, Input/Output	SMA Female		
Interface Connector	Micro-D, 9-pin Socket		
Cooling	Adequate Heatsink Required		

Environmental Specifications


Parameter	Symbol	Min	Typ	Max	Unit
Operating Temperature (ambient)	T_A	-40		+60	°C
Operating Temperature (baseplate)	T_C	-40		+85	°C
Storage Temperature	T_{STG}	-55		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Altitude MIL-STD-810F - Method 500.4	ALT			30,000	ft
Vibration / Shock Profile (Random profile in x,y, z axis, as per Figure for 15 minute duration in each axis)		<p>The graph shows a trapezoidal power spectral density profile. The y-axis is Power Spectral Density in g^2/Hz and the x-axis is Frequency in Hz. The profile starts at 20 Hz, rises with a slope of +3 dB/octave to 80 Hz, remains constant at 0.04 g^2/Hz until 350 Hz, and then falls with a slope of -3 dB/octave to 2000 Hz.</p>			

NuPower™ 12B01A Power Amplifier


Performance Plots

Test Conditions: +28 VDC, +25 °C, $Z_S=Z_L=50 \Omega$


RF Output Power vs. Frequency
[@ 0 dBm Input Drive w/ Std Dev]

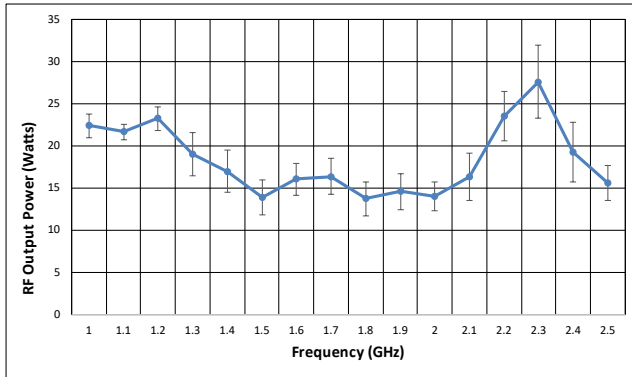


Gain vs. Input Power

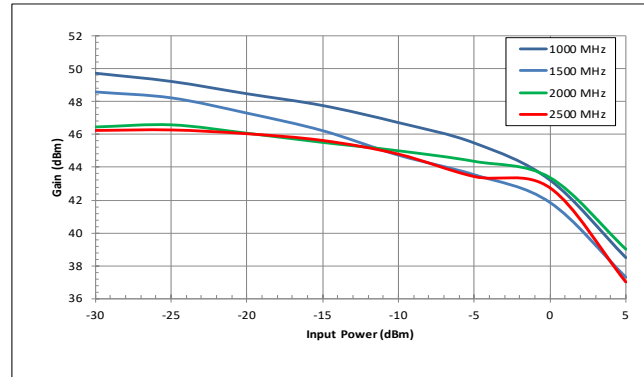


P1dB & P3dB

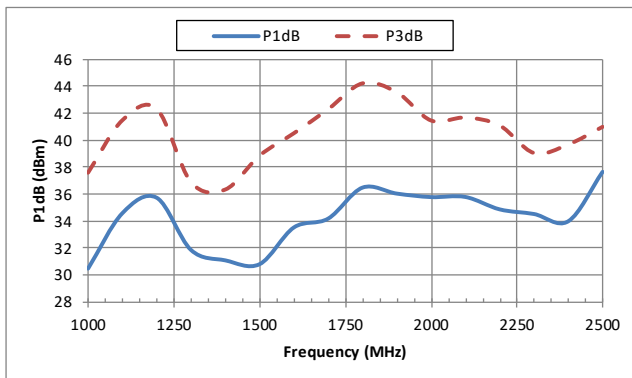


OIP3

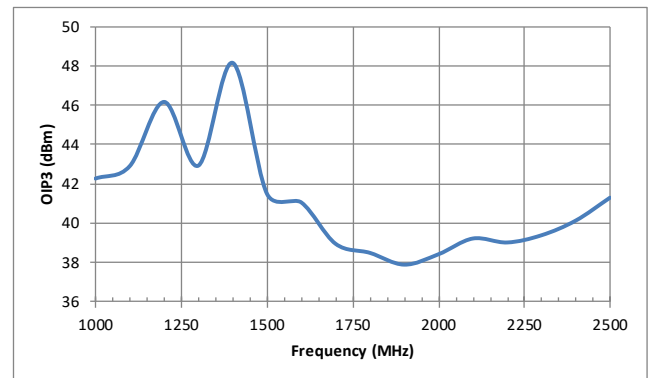

Frequency vs. Module Efficiency
[@ 0 dBm Input Drive w/ Std Dev]

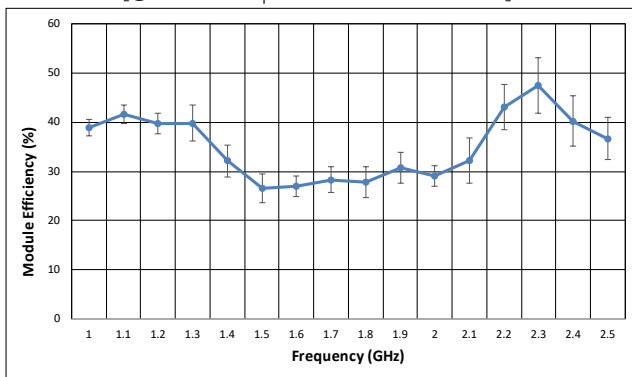


Harmonics (@ Psat)

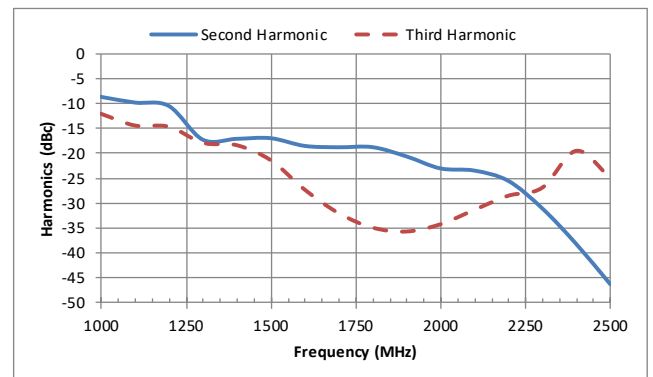


NuPower™ 12B01A Power Amplifier

Performance Plots (cont.)


Error Vector Magnitude (%) [w/ OFDM Waveform]

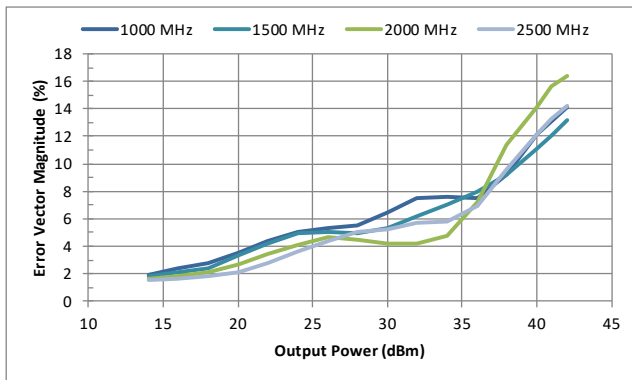


Error Vector Magnitude (dB) [w/ OFDM Waveform]

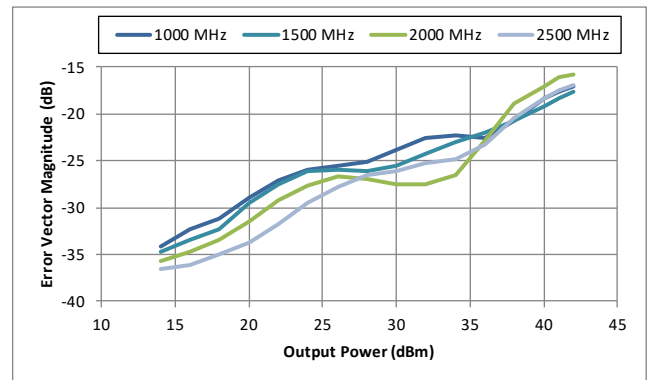


VSWR

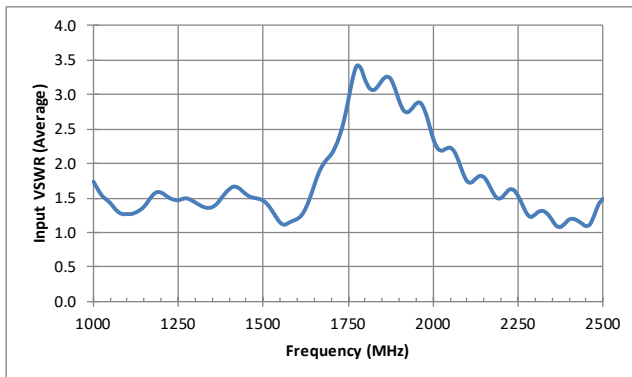

Power Out vs. Temperature (ambient)

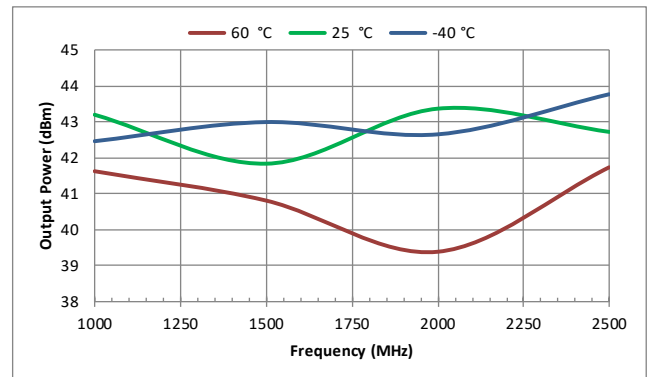


Current Consumption vs. Frequency
[@ 0 dBm Input Drive w/ Std Dev]

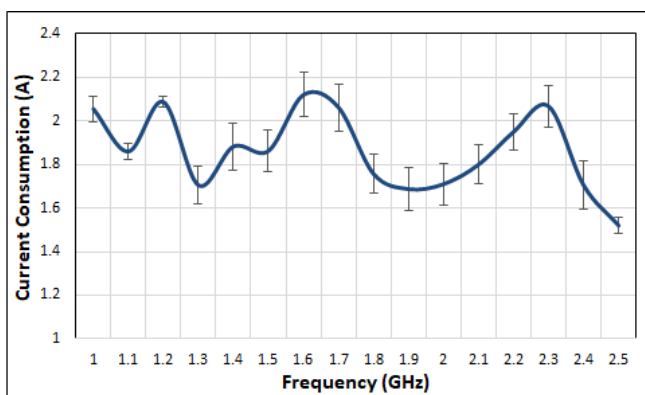

NuPower™ 12B01A Power Amplifier

Mechanical Outline

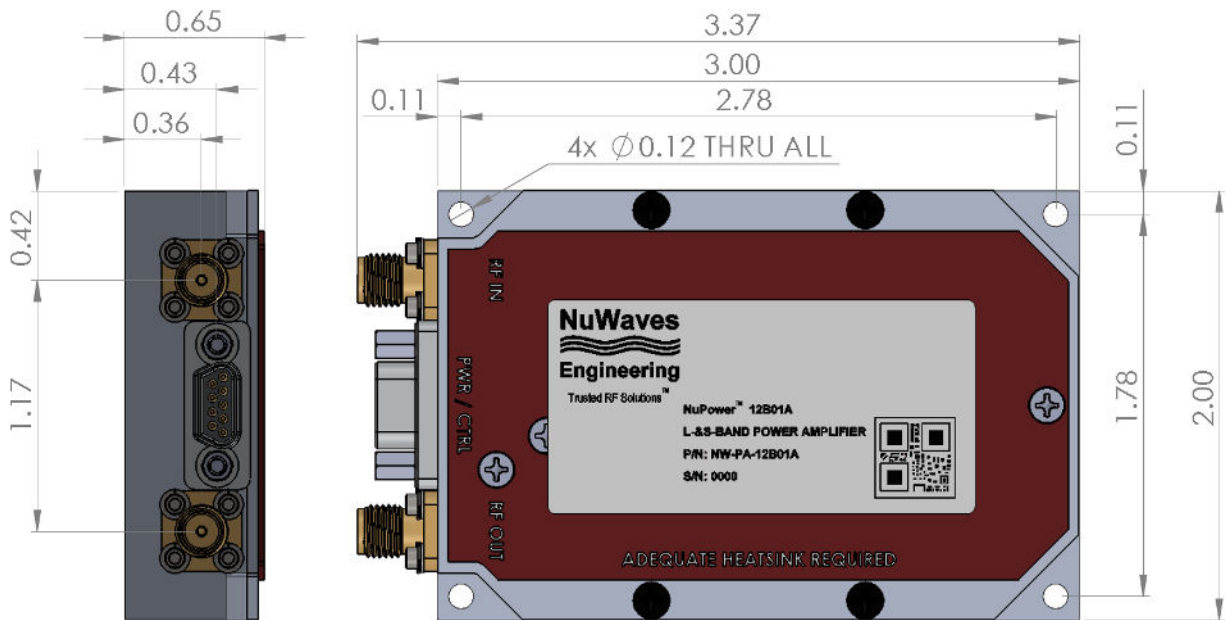

Accessory Part Numbers - Sold Separately

Part Number	Description
NW-FL-05LPLE-2500-SFSF-M01	Harmonic Filter Module
NW-PA-ACC-CB09MA	Standard Interface Cable Assembly - Flying Leads
NW-PA-ACC-CT09MA	Upgraded Interface Cable Assembly - Banana Plug Termination
HTSK-01	Heatsink with Integrated Fan

Pinout

Function	I/O	Pin
DC Power (+11 to +32 VDC)	I	1, 2
Ground	I	3, 4
RF Enable 0V or GND = RF ON +5V or NC = RF OFF	I	5
No Connect	-	6, 7, 9
Over Temperature Flag 0V = temperature fault +5V = no fault	0	8

For information on product disposal (end-of-life), please refer to this document: <https://nuwaves.com/wp-content/uploads/Product-Disposal-End-of-Life.pdf>

Contact NuWaves



NuWaves RF Solutions
132 Edison Drive
Middletown, OH 45044

www.nuwaves.com
sales@nuwaves.com
513.360.0800

