



Trusted RF Solutions™

NuPower™ 05E05A S-Band Solid State Power Amplifier

20 Watts (CW)
2.0 - 2.6 GHz
12 Watts Linear, 5% EVM @ 41dBm



P/N: NW-PA-05E05A

(Includes NW-PA-ACC-CB09MC interface cable)

The NuPower™ 05E05A is a small, highly efficient connectorized solid state power amplifier that provides 20 watts (min) of RF power to boost performance of data links and transmitters.

The NuPower 05E05A accepts a nominal 0 dBm (1 mW) RF input and provides >43 dB of gain from 2000 MHz to 2600 MHz for continuous wave (CW) and near-constant-envelope waveforms.

Based on the latest gallium nitride (GaN) technology, the NuPower 05E05A's 35% to 50% power efficiency at rated power and <10 in³ form factor make it ideal for size, weight, and power-constrained broadband RF telemetry, tactical communication, and electronic warfare systems.

NuPower PAs feature over-voltage protection and can operate over a wide temperature range of -40 °C to +85 °C (baseplate).

Extend your operational communication range with NuPower™ amplifiers from NuWaves Engineering.

Features

- 20 Watts RF Output Power (min)
- 2000 MHz to 2600 MHz
- Small Form Factor (4.50" x 3.50" x 0.61")
- High-Efficiency GaN Technology
- 0 dBm Nominal RF Input
- Over-Voltage Protection
- Logic On/Off Control

Benefits

- Extended Range
- Improved Link Margin
- Reduced load on DC power budget due to high efficiency operation
- Requires less volume on space-constrained platforms

Applications

- Broadband RF Telemetry
- RF Communication Systems
- Electronic Warfare - Airborne Electronic Attack
- Unmanned Aircraft Systems (UAS)
- Unmanned Ground Vehicles (UGV)
- Software Defined Radios



NuPower™ 05E05A Power Amplifier

Specifications

Absolute Maximums

Parameter	Rating	Unit
Max Device Voltage	32	V
Max Device Current	3.25	A
Max RF Input Power, $Z_L = 50 \Omega$	12	dBm
Max Operating Temperature (ambient)	85	°C
Max Operating Temperature (baseplate)	85	°C
Max Storage Temperature	85	°C

Export Classification
ECCN 5A991.G

Electrical Specifications @ 28 VDC, 25 °C, $Z_S=Z_L=50 \Omega$

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Operating Frequency	BW	2000		2600	MHz	
RF Output Power	P_{SAT}	20	30		W	2000 MHz - 2600 MHz, 0 dBm input
Output Power @ 1dB Compression	P1dB		31		dBm	2000 MHz
			31			2300 MHz
			29			2600 MHz
Small Signal Gain	G		51		dB	2000 MHz, @ -40 dBm input
			49			2300 MHz, @ -40 dBm input
			49			2600 MHz, @ -40 dBm input
Small Signal Gain Flatness	ΔG		2.5		dB	Pin = -40 dBm
Input VSWR	VSWR		2.2			
Nominal Input Drive Level	P_{IN}		0		dBm	
Operating Voltage	VDC	27	28	30	V	
Quiescent Current (unbiased)	I_{DQ}		0.10		A	RF Enable Floating
Quiescent Current (biased)	I_{DQ}		0.65		A	RF Enable Low
Operating Current	I_{DD}		2.4		A	Pin = 0 dBm
Module Efficiency			45		%	Pin = 0dBm, +28V
Switching Speed	$T_{XON/OFF}$			2	μS	10% to 90%
Third Order Order Intercept Point (Two tone test at 1 MHz spacing, $P_{out} = 20$ dBm / tone)	OIP3		44		dBm	2000 MHz
			44			2300 MHz
			43			2600 MHz
Harmonics	2nd		-20		dBc	
	3rd		-25			
Output Mismatch (No Damage)				10:1	Ψ	No Damage at All Phase Angles

NuPower™ 05E05A Power Amplifier

Specifications (cont.)


Mechanical Specifications

Parameter	Value	Unit	Limits
Dimensions	4.5 x 3.5 x 0.61	in	Max
Weight	9	oz	Max
RF Connectors, Input/Output	SMA Female		
Interface Connector	Micro-D, 9-pin Socket		
Cooling	Adequate Heatsink Required		

Environmental Specifications

Parameter	Symbol	Min	Typ	Max	Unit
Operating Temperature (ambient)	T _A	-40		+60	°C
Operating Temperature (baseplate)	T _C	-40		+85	°C
Storage Temperature	T _{STG}	-55		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Altitude MIL-STD-810F - Method 500.4	ALT			30,000	ft

Vibration / Shock Profile
(Random profile in x,y, z axis, as per Figure for 15 minute duration in each axis)

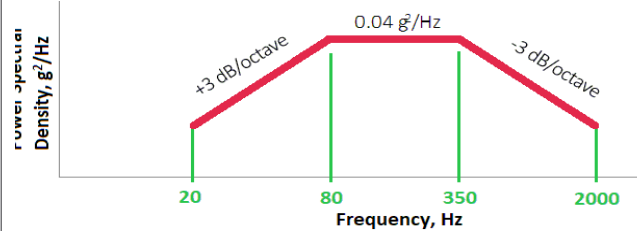


NuPower™ 05E05A Power Amplifier


Performance Plots

Test Conditions: +28 VDC, +25 °C, $Z_s=Z_L=50 \Omega$


Output Power [0dBm Input Power]

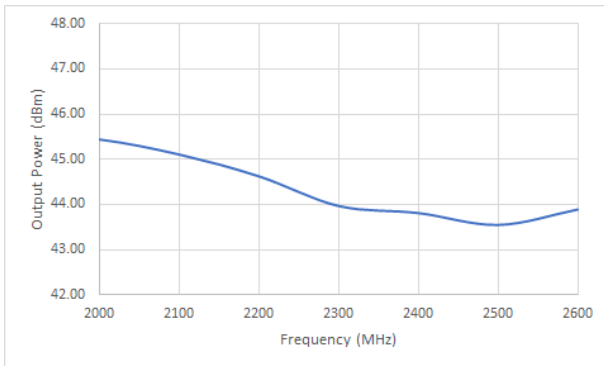


Small Signal Gain [-40dBm Input Power]

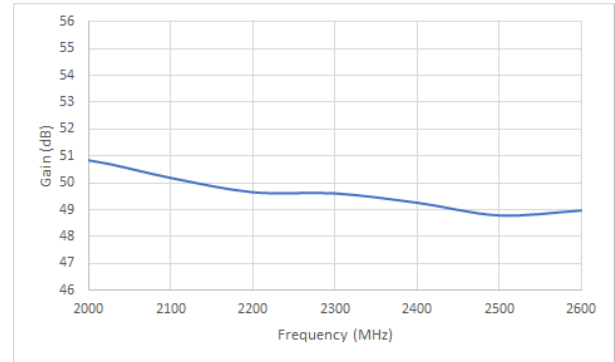


Output Power vs. Input Power

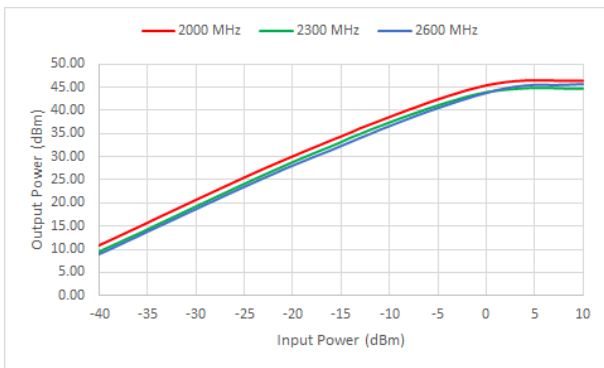


P1dB & P3dB

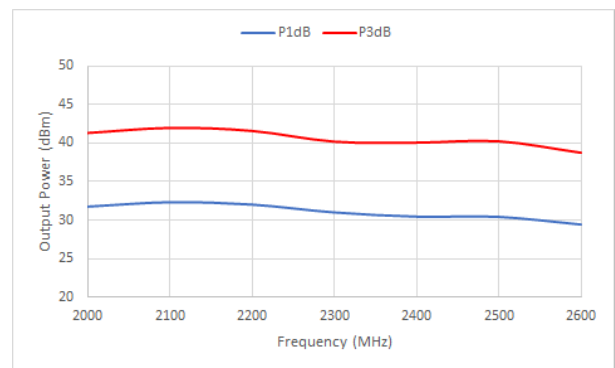


Efficiency vs. Output Power

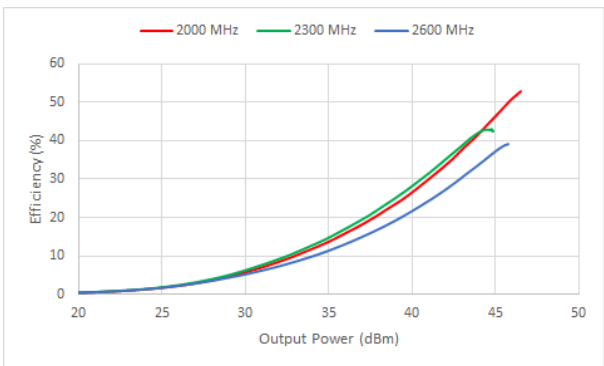


Harmonics [@Psat]

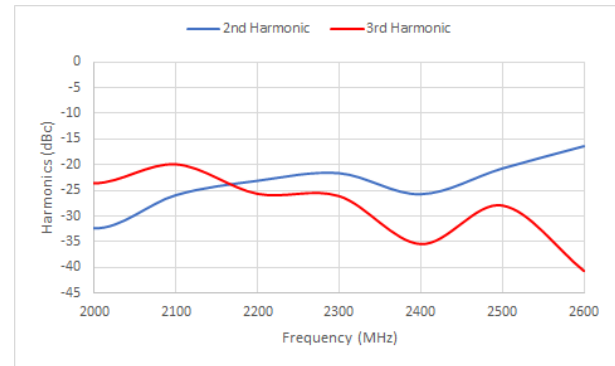

Output Power vs. Temperature [Baseplate]

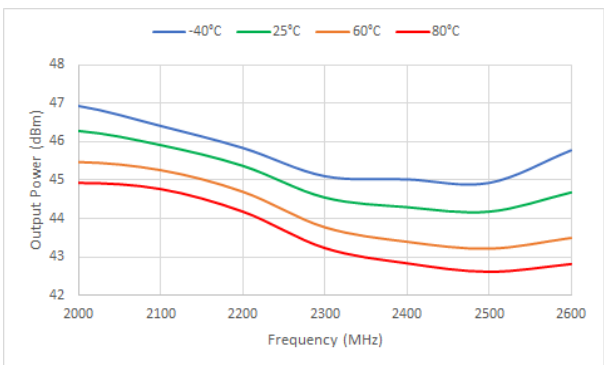


Error Vector Magnitude vs. Output Power [QPSK, 1Msps, 35% Roll Off Rate]

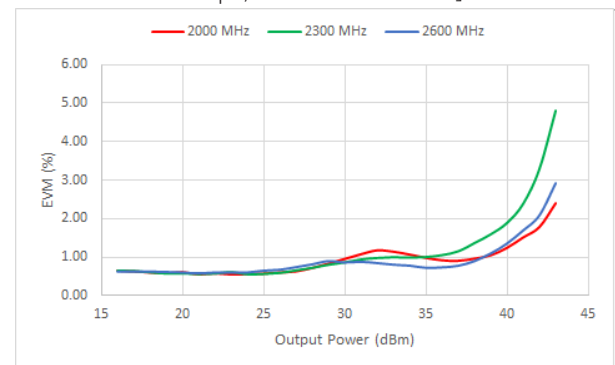


NuPower™ 05E05A Power Amplifier

Performance Plots (cont.)


Error Vector Magnitude vs. Output Power [16QAM, 2Msps, 35% Roll Off Rate]

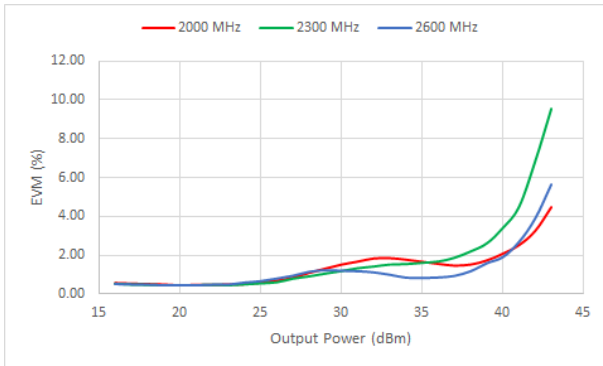


Error Vector Magnitude vs. Output Power [64QAM, 5Msps, 10% Roll Off Rate]

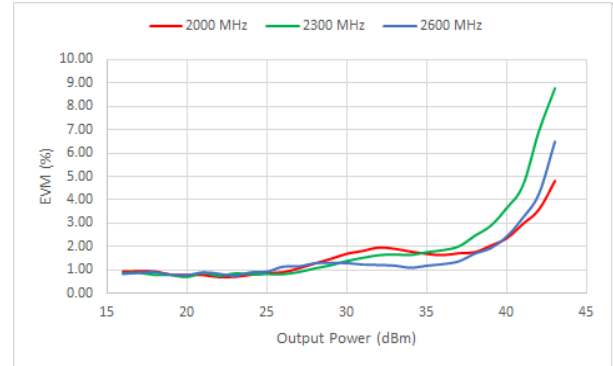

OIP3 [20dBm per tone, 1MHz spacing]


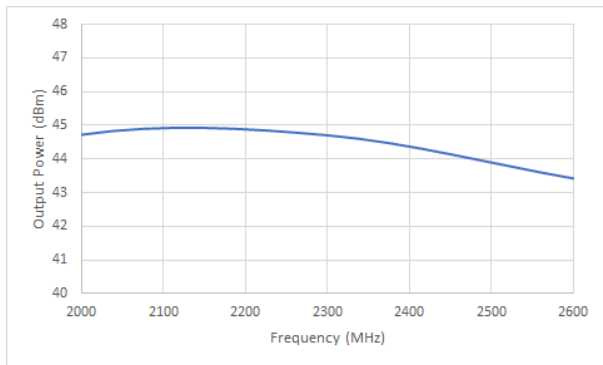


Input VSWR

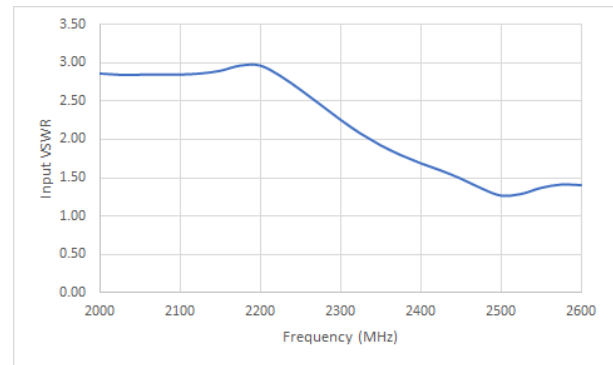


NuPower™ 05E05A Power Amplifier

Mechanical Outlines

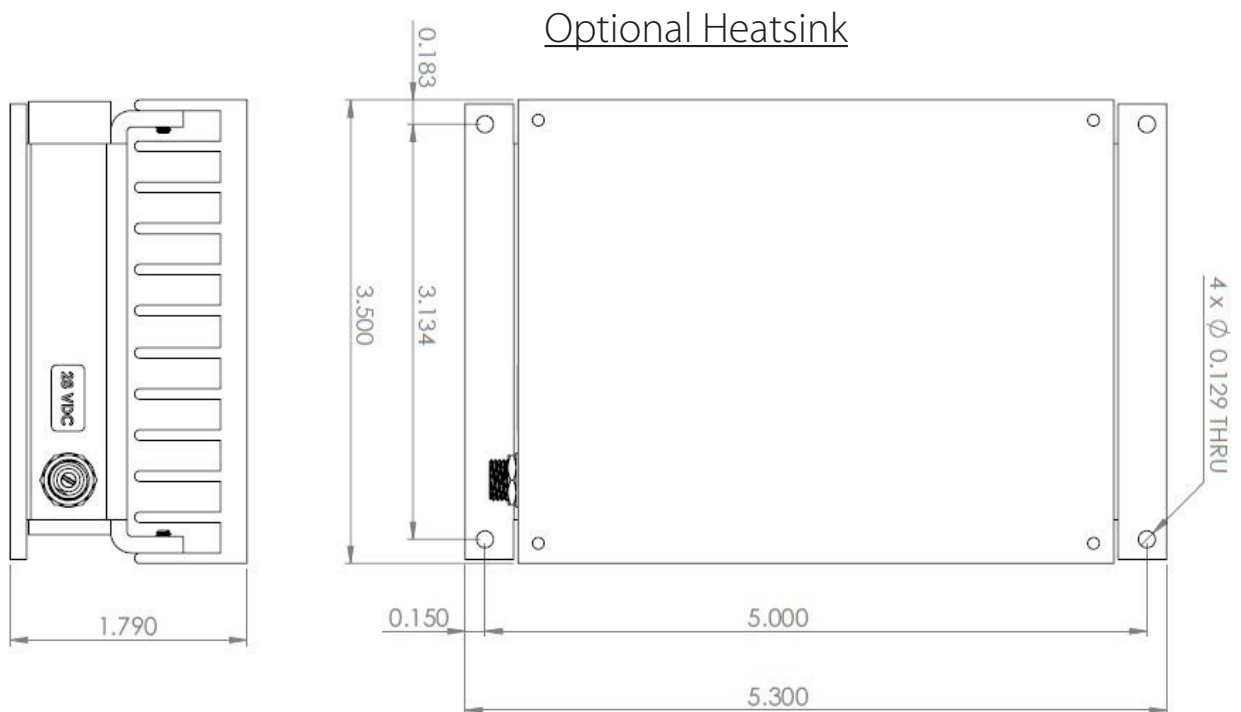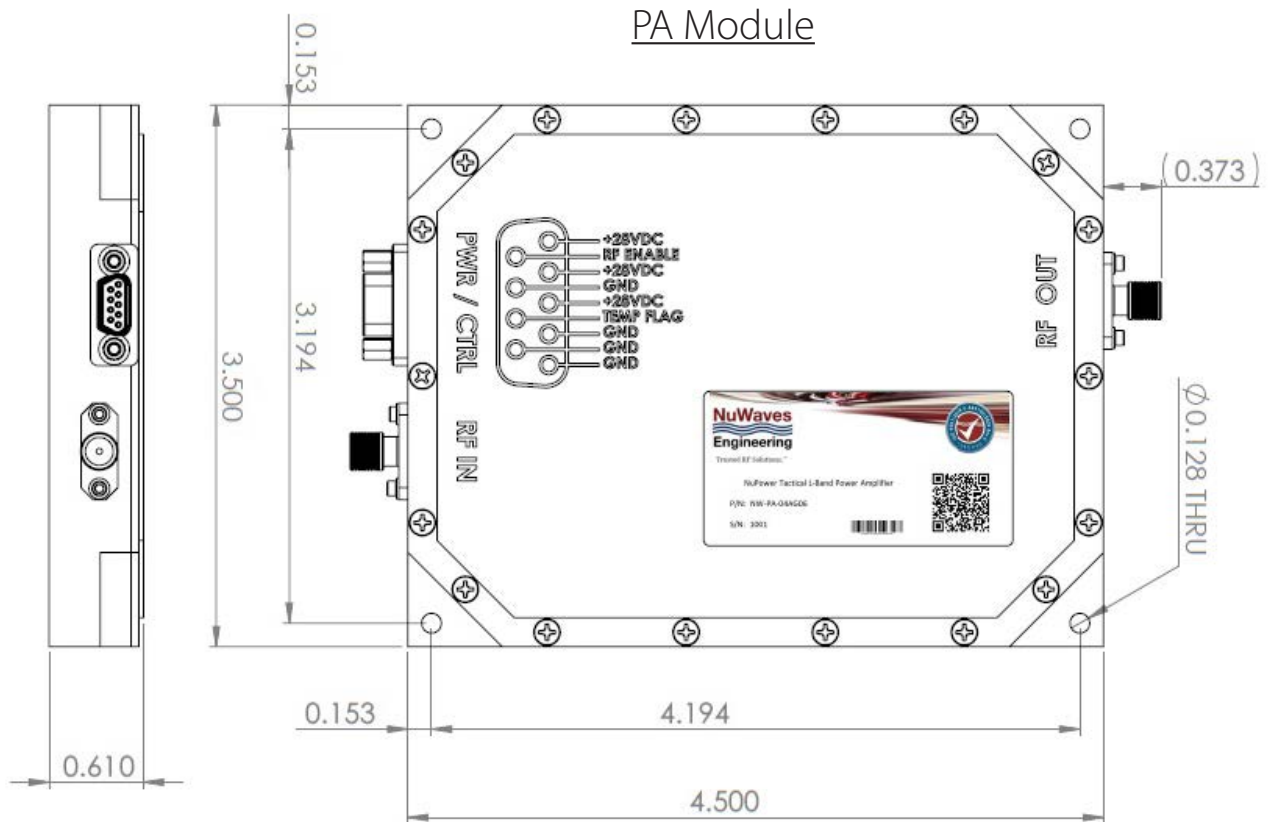


NuPower™ 05E05A Power Amplifier

PA Module and Accessory Images

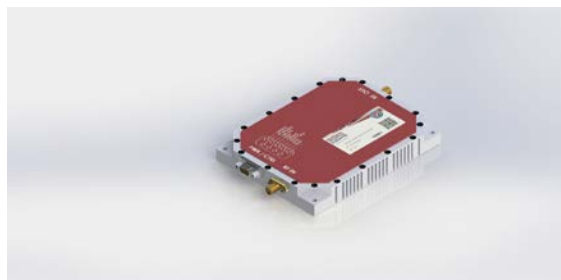

PA Module

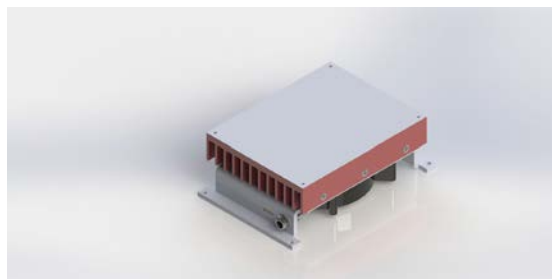

Optional Fan-Cooled Heatsink



PA Module w/ Fan-Cooled Heatsink

Accessory Part Numbers

Part Number	Description
NW-FL-05LPLE-2500-SFSF-M01	Harmonic Filter Module
NW-PA-ACC-CB09MC	Standard Interface Cable Assembly - Flying Leads (included with module)
NW-PA-ACC-CT09MC	Upgraded Interface Cable Assembly - Banana Plug Termination
NW-PA-ACC-KT03	Accessory Kit, which includes Fan-Cooled Heatsink and Upgraded Interface Cable
NW-PA-ACC-HS05	Heatsink with Integrated Fan

Pinout

Function	I/O	Pin
DC Power (+28 Volts)	I	3, 4, 5
Ground	I	1, 2, 6, 8
Over Temperature Flag 0V = temperature fault +5V = no fault	O	7
RF Enable 0V or GND = RF ON +5V or NC = RF OFF	I	9

For information on product disposal (end-of-life), please refer to this document:
<https://nuwaves.com/wp-content/uploads/Product-Disposal-End-of-Life.pdf>

Contact NuWaves



NuWaves Engineering
132 Edison Drive
Middletown, OH 45044

www.nuwaves.com
product.sales@nuwaves.com
513.360.0800

 **NuWaves**
engineering
Trusted RF Solutions™