



## NuPower Xtender™ LS10S01-D19 L- & S-Band Bidirectional Amplifier

25 Watt CW  
1.0 GHz - 2.5 GHz

P/N: NW-BA-LS-10-S01-D19

Contact [sales@nuwaves.com](mailto:sales@nuwaves.com) for custom options



**The NuPower Xtender™ LS10S01-D19 is a small, lightweight, and power-efficient bidirectional amplifier ideal for extending the communication range of half-duplex L- or S-band transceivers. The bidirectional amplifier typically generates 25 Watts of RF power from 1000 to 2500 MHz in transmit mode and the integrated low-noise amplifier typically provides 14 dB of gain in receive mode.**

Based on the latest gallium nitride (GaN) technology, the Xtender typically offers 39% power efficiency at most frequencies and its compact size makes it ideal for integration into space-constrained platforms. Adjacent radio frequency bands, such as the popular 900 MHz Industrial, Scientific and Medical (ISM) band, are also supported by the bidirectional PA, at lower peak power levels.

Accepting a nominal +19 dBm RF input, the Xtender typically provides 25 dB of power gain. The Xtender also features over-voltage and reverse-voltage protection and operates over a wide temperature range of -40 to +85 °C baseplate.

**Extend your operational communication range with NuPower™ amplifiers from NuWaves RF Solutions.**

### Features

- 25 Watts (typ) RF Output Power
- 1.0 to 2.5 GHz
- Bidirectional Operation
- 25 dB (typ) of Transmit Power Gain
- 14 dB (typ) Receive Gain
- Fast T/R Mode Switching with Auto-Sensing or Manual T/R Line
- Small Form Factor
- High Efficiency GaN Technology
- Over-Voltage & Reverse-Voltage Protection

### Applications

- Unmanned Aircraft Systems (UAS) - Group 2 and Group 3
- Unmanned Ground Vehicles (UGV)
- Software Defined Radios
- Air Launch Effect (ALE)
- Common Launch Tube (CLT)
- Counter UAS Detection and Mitigation
- MIMO/MANET Radio Range Extension
- SISO Radio Range Extension

# NuPower Xtender™ LS10S01-D19 BDA

## Specifications

### Absolute Maximums

Parameter	Rating	Unit
Max Device Voltage	32	V
Max Device Current	3.5	A
Max RF Input Power, CW, $Z_L = 50 \Omega$	XCVR Port <sup>1</sup> : +33	dBm
	ANT Port <sup>2</sup> : +30	
Max Operating Temperature (ambient)	60	°C
Max Operating Temperature (baseplate)	85	°C
Max Storage Temperature	85	°C

Export Classification
EAR99

<sup>1</sup>Max operational XCVR input power +22dBm

<sup>2</sup>Max operational receive input power = -20 dBm (Autosense Mode only)

### Electrical Specifications - Operational @ 28 VDC, 25 °C, $Z_S=Z_L=50 \Omega$ , CW, Pin = + 19 dBm (unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Operating Frequency	BW	1000		2500	MHz	
Switching Speed	TX <sub>ON/OFF</sub>		0.95	1.5	$\mu$ S	Rx - Tx (Manual T/R)
			1.3	1.5		Tx - Rx (Manual T/R)
			1.3	1.5		Rx - Tx (Autosense)
			1.6	2.0		Tx - Rx (Autosense)
Operating Voltage	VDC	11	28	32	V	
Operating Current (Transmit)	I <sub>DD</sub>		2.3	3.5	A	
Module Efficiency (Transmit)			39		%	

### Electrical Specifications - Transmit @ 28 VDC, 25 °C, $Z_S=Z_L=50 \Omega$ , CW, Pin = +19 dBm (unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Condition
RF Output Power, Psat	Psat	10	25		W	
Transmit Gain	G		25		dB	
Power Gain Flatness	$\Delta$ G		$\pm 1$		dB	1-2.5 GHz
Small Signal Gain	G		32			Pin=-20 dBm, 1-2.5 GHz
Small Signal Gain Flatness	$\Delta$ G		$\pm 3$		dB	Pin= -20 dBm, 1-2.5 GHz
Harmonics	2nd		TBD		dBc	
	3rd		TBD			
Nominal Input Drive Level	P <sub>IN</sub>		19	22	dBm	
Quiescent Current	I <sub>DQ</sub>		75		mA	T/R Enable Off (Receive Current)
Transmit Current	I <sub>TX</sub>		2.3	3.5	A	
Transmit Input VSWR (XCVR Port)	VSWR		1.3:1			
Transmit Output Mismatch VSWR	VSWR			10:1	$\Psi$	No damage at all phase angles

### Electrical Specifications - Receive @ 28 VDC, 25 °C, $Z_S=Z_L=50 \Omega$ , CW, -30 dBm Input Power (unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Receive Gain	G	12	14		dB	
Receive P1dB	P1dB		16		dBm	Pin=+3 dBm (typ)
Receive Gain Flatness	$\Delta$ G		$\pm 1$		dB	1-2.5 GHz

# NuPower Xtender™ LS10S01-D19 BDA

## Specifications (cont.)

Electrical Specifications - Receive (cont.) @ 28 VDC, 25 °C,  $Z_S=Z_L=50 \Omega$ , CW, -30 dBm Input Power (unless otherwise specified)


Parameter	Symbol	Min	Typ	Max	Unit	Condition
Receive Current	$I_{RX}$		75		mA	
Receive Noise Figure	NF		2.1		dB	
Receive Input VSWR (ANT Port)	VSWR		1.6:1			

## Mechanical Specifications

Parameter	Value	Unit	Limits
Dimensions	3.0 x 2.0 x 0.65	in	Max
Weight	4	oz	Max
RF Connectors, Input/Output	SMA Female		
Interface Connector	Micro-D, 9-pin Socket		
Cooling	Adequate Heatsink Required		

## Environmental Specifications


Parameter	Symbol	Min	Typ	Max	Unit
Operating Temperature (ambient)	$T_A$	-40		+60	°C
Operating Temperature (baseplate)	$T_C$	-40		+85	°C
Storage Temperature	$T_{STG}$	-55		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Altitude MIL-STD-810F - Method 500.4	ALT			30,000	ft
Vibration / Shock Profile (Random profile in x,y, z axis, as per Figure for 15 minute duration in each axis)					

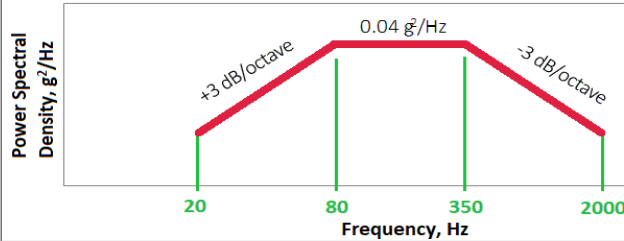


## Transmit Performance Plots

Test Conditions: +28 VDC, +25 °C,  $Z_S=Z_L=50 \Omega$ , CW, +19 dBm Input Power (unless otherwise specified)

Output Power

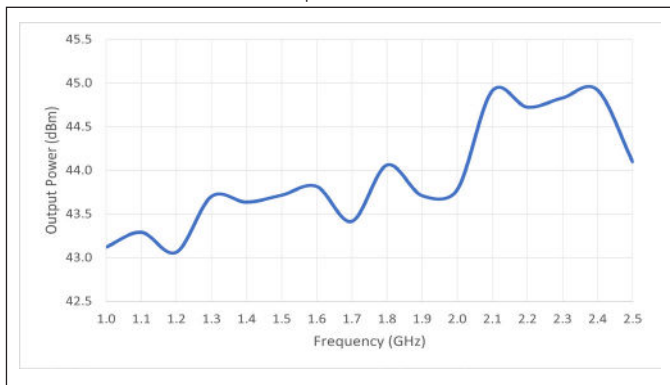

Output Power - Stepped Input Power

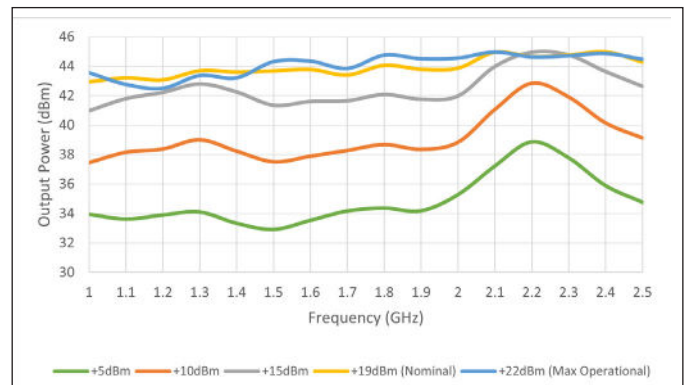


# NuPower Xtender™ LS10S01-D19 BDA


## Transmit Performance Plots (cont.)

Test Conditions: +28 VDC, +25 °C,  $Z_S=Z_L=50 \Omega$ , CW, +19 dBm Input Power (unless otherwise specified)


Output Power vs. Input Power

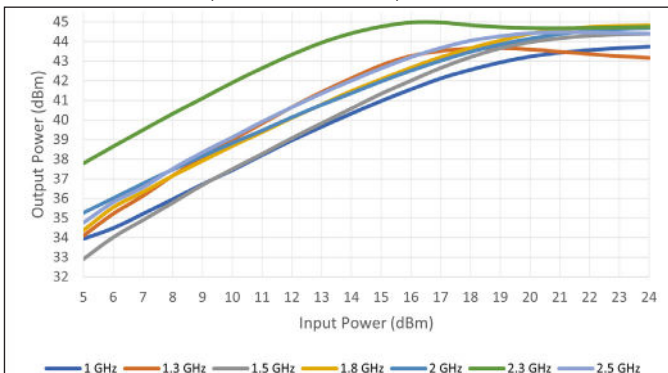


Output Power vs. Input Voltage

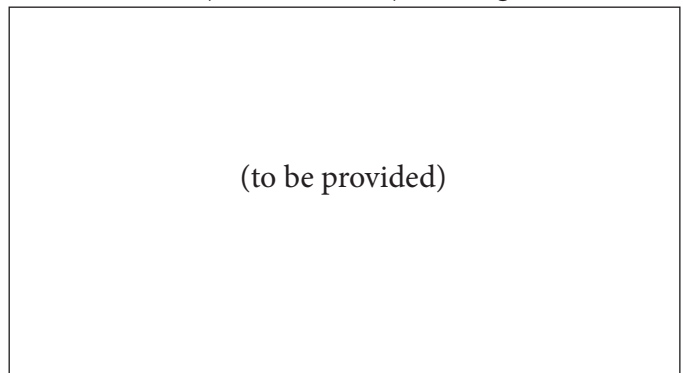


Current Consumption

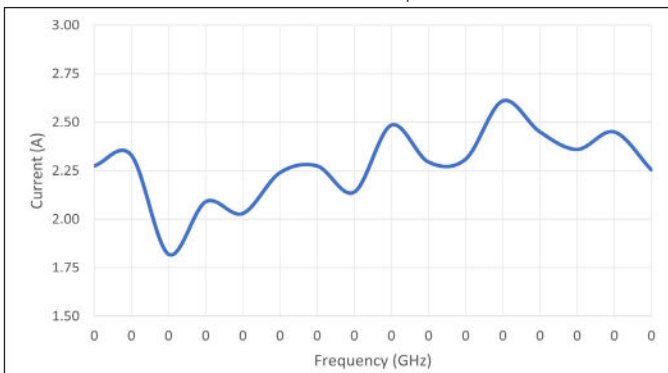


Transmit Small Signal Gain [-20 dBm Input Power]

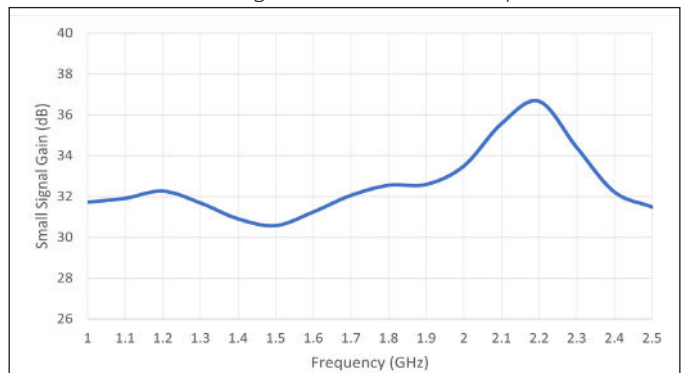


Efficiency

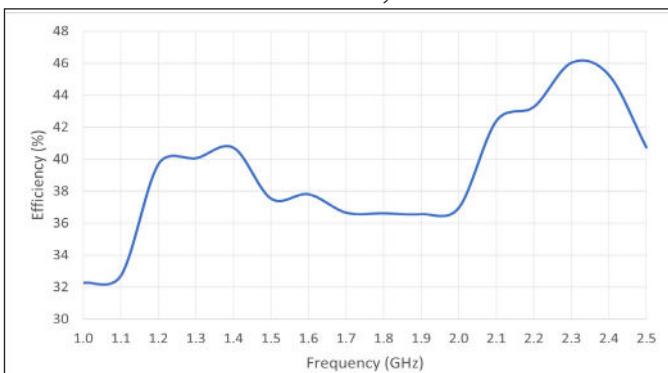


Efficiency vs. Output Power

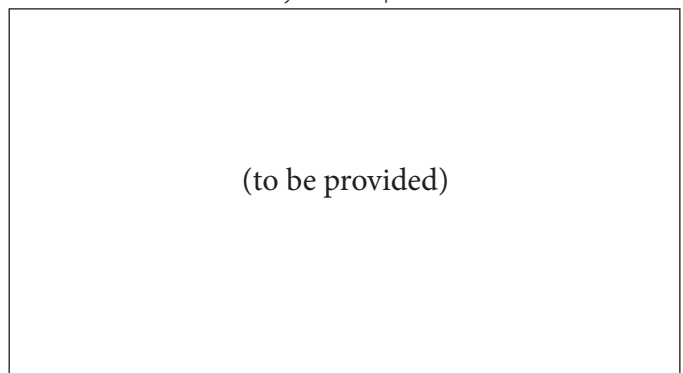

Transmit Input VSWR

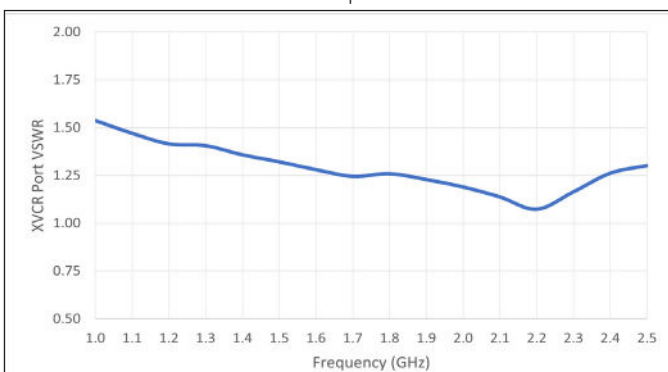

Harmonics

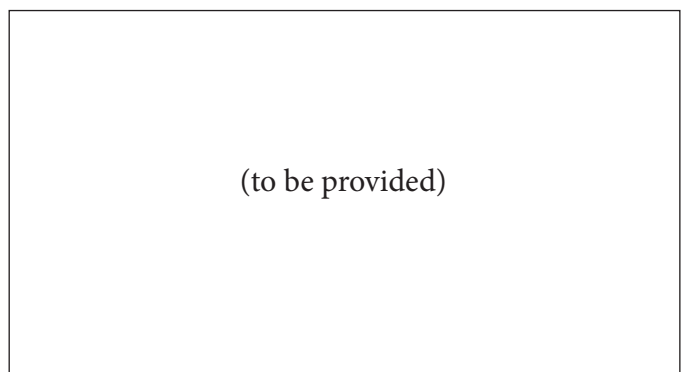


# NuPower Xtender™ LS10S01-D19 BDA


## Transmit Performance Plots (cont.)

Test Conditions: +28 VDC, +25 °C,  $Z_s=Z_L=50 \Omega$ , CW, +19 dBm Input Power (unless otherwise specified)


Transmit P1dB & P3dB

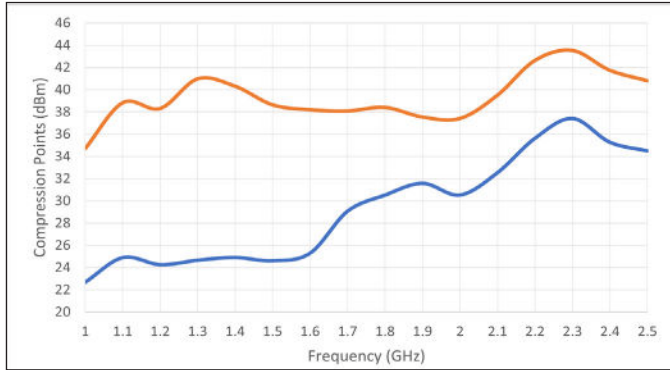


EVM vs. Output Power [QPSK, 1 Msps, 35% Filter]

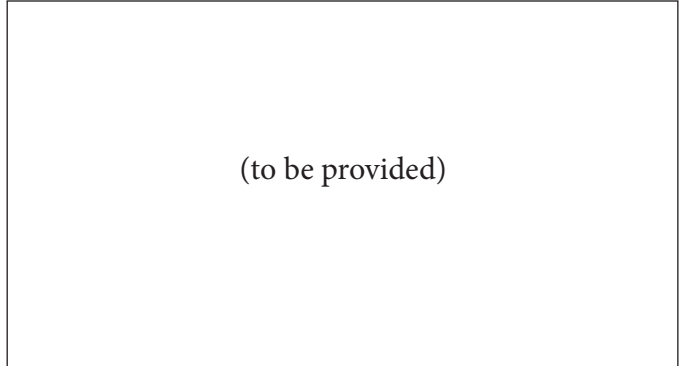

EVM vs. Output Power [16 QAM, 2 Msps, 35% Filter]

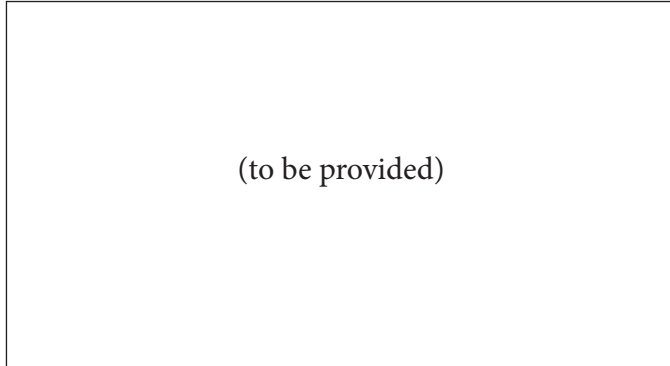

EVM vs. Output Power [64 QAM, 5 Msps, 10% Filter]

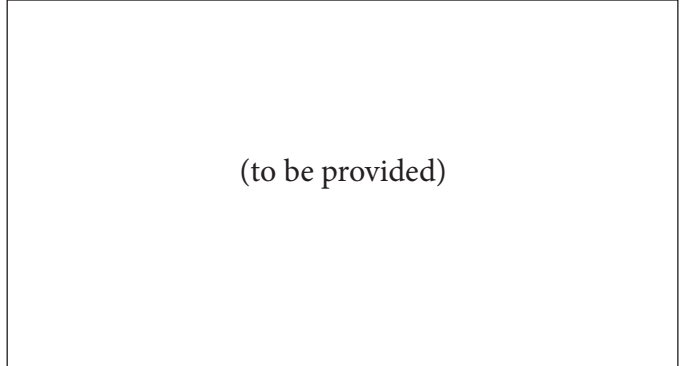


# NuPower Xtender™ LS10S01-D19 BDA


## Receive Performance Plots

Test Conditions: +28 VDC, +25 °C,  $Z_s=Z_L=50 \Omega$ , CW, -30 dBm Input Power (unless otherwise specified)


### Receive Gain

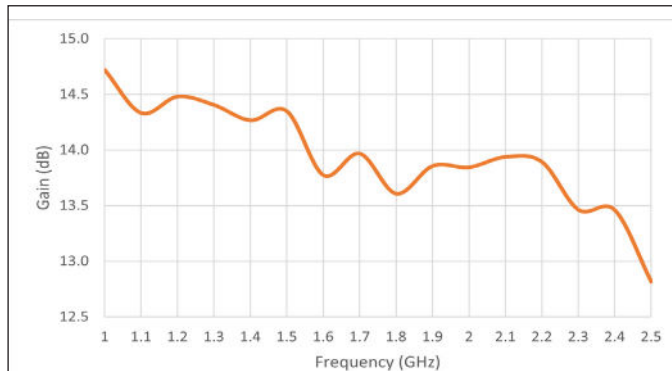


### Receive Gain vs Temperature

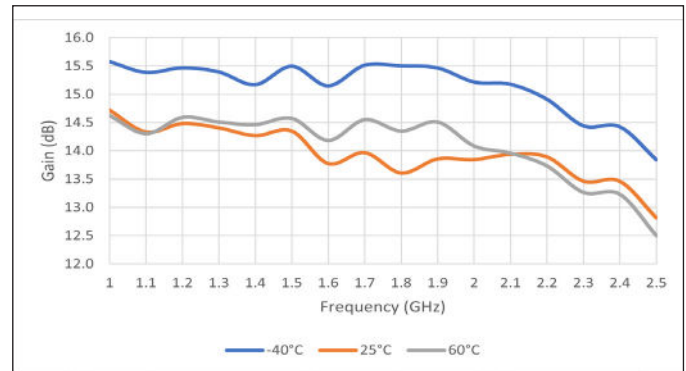


### Receive P1dB

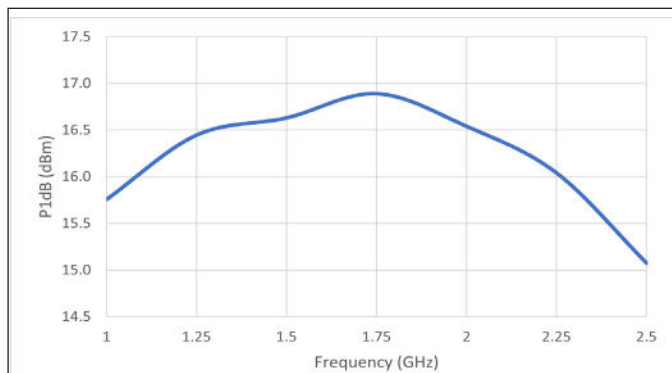


### Receive Noise Figure

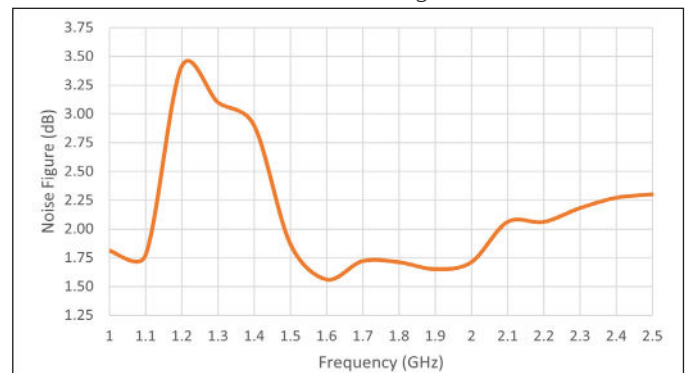

### Receive Noise Figure vs Temperature

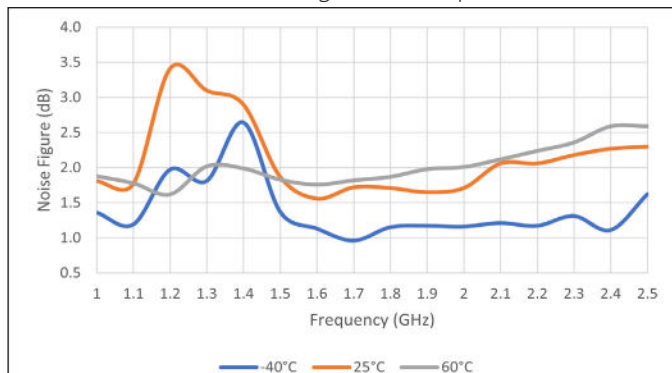


### Receive Input VSWR

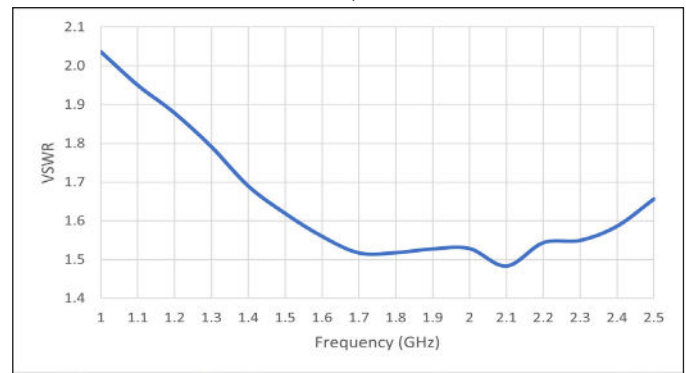

# NuPower Xtender™ LS10S01-D19 BDA


## Mechanical Outline

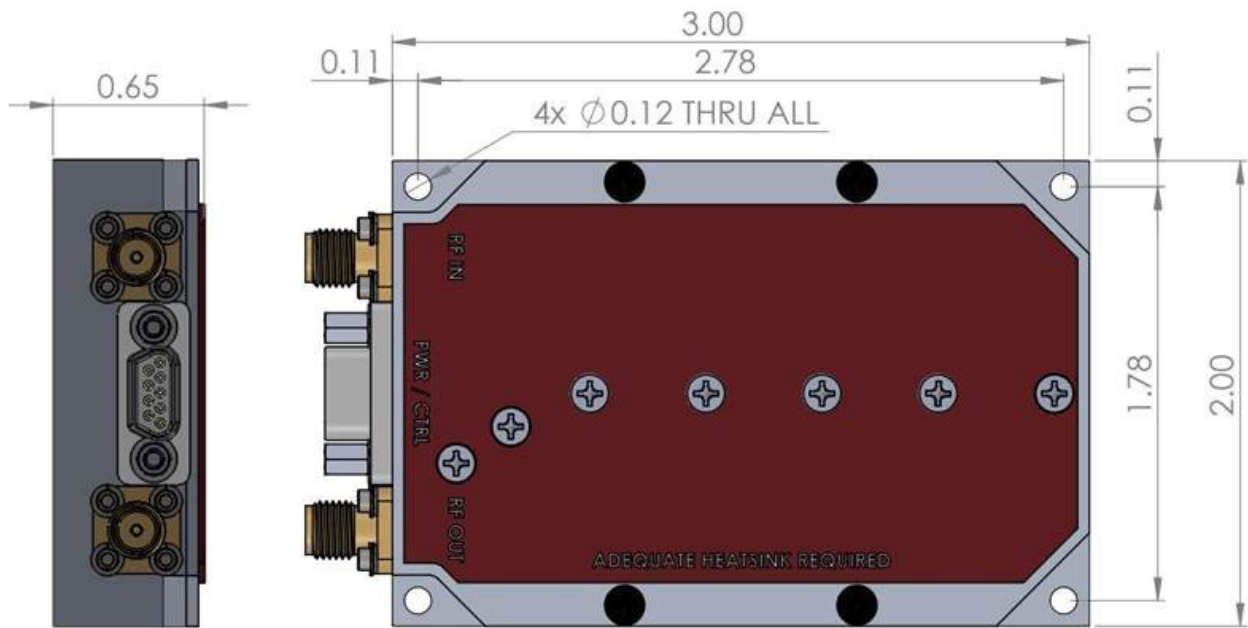

# NuPower Xtender™ LS10S01-D19 BDA

## Optional Heatsink Drawing

Heatsink and Integrated Fan: HTSK-01

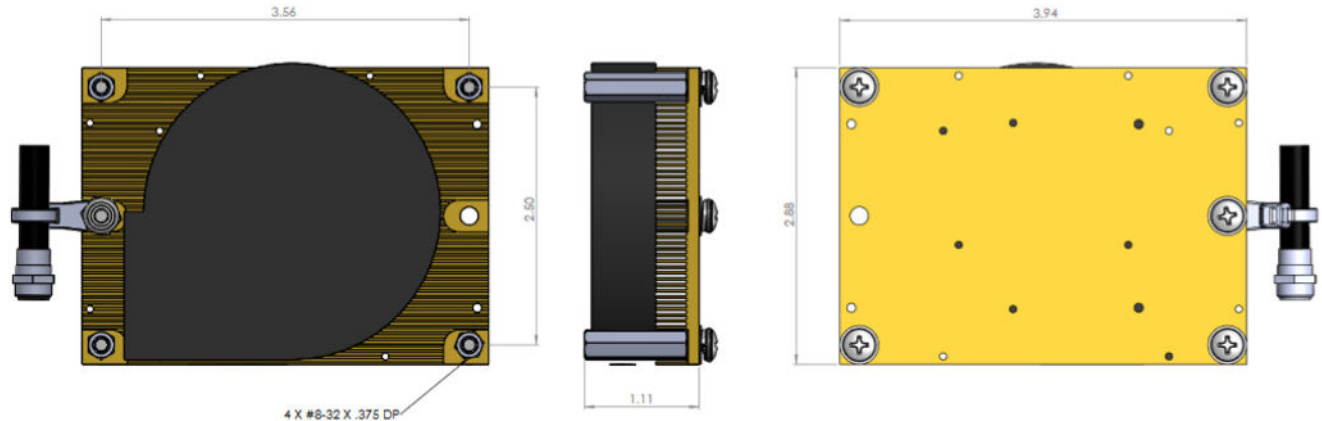

## Accessory Part Numbers - Sold Separately

Part Number	Description
<a href="#">NW-FL-05LPLE-2500-SFSF-M01</a>	Harmonic Filter Module
NW-BA-ACC-CB09MA	Standard Interface Cable Assembly - Flying Leads
NW-BA-ACC-CT09MA	Upgraded Interface Cable Assembly - Banana Plug Termination
HTSK-01	Heatsink with Integrated Fan

For information on product disposal (end-of-life), please refer to this document: <https://nuwaves.com/wp-content/uploads/Product-Disposal-End-of-Life.pdf>

## Pinout

Function	I/O	Pin	Logic Voltage
DC Power (Primary Power, +11 to +32 Volts)	I	1, 2, 9	-
Ground (DC Return)	I	3, 4, 5	-
RS-485 Data Transmit	O	6	-
RS-485 Data Receive	I	7	-
T/R Enable			3.3V Logic <sup>2</sup> High: 2.31 - 3.8 VDC Low: -0.5 - 0.99 VDC
T/R Mode: Source (Autosense) <sup>1</sup> T/R Mode: Sink (Manual T/R) <sup>3</sup> [High TX / Low RX]	I/O	8	5V Logic <sup>2</sup> High: 3.5 - 5.5 VDC Low: -0.5 - 1.5 VDC

<sup>1</sup>Autosense automatically switches to transmit and receive based on input signal strength. Typical threshold is 0 dBm; see user manual for complete information.

<sup>2</sup>Logic level configurable by user or factory. Default logic level is 3.3V.

<sup>3</sup>Default T/R mode is Manual (sink) mode.

## Contact NuWaves



NuWaves RF Solutions  
132 Edison Drive  
Middletown, OH 45044

[www.nuwaves.com](http://www.nuwaves.com)  
[sales@nuwaves.com](mailto:sales@nuwaves.com)  
513.360.0800

