NuWaves
RF Solutions

NuFilter™ 04BPCV-4019-SFSF-M01
C-Band Bandpass Filter

3969 MHz to 4069 MHz

P/N: NW-FL-04BPCV-4019-SFSF-M01

NuWaves' NuFilter™ 04BPCV-4019-SFSF-M01 is a small form bandpass RF filter designed to reduce harmonics at the output of transmitters operating in C-Band.

The NuFilter™ 04BPCV-4019-SFSF-M01 provides superior harmonic and noise filtering, as demonstrated by the rejection levels of greater than 30 dB at 3884 and 4154 MHz. This high-performance module accepts input power levels up to 50 W, with only a minimal 0.6 dB of insertion loss in the passband frequency range of 3969 to 4069 MHz.

With standard SMA connectors, the NuFilter™ can be easily added to any RF system. NuWaves' NuFilter™ removes the time and cost burden of creating a design, laying out a PCB, buying parts, assembling, and testing. Allow NuWaves to save you time and money by outsourcing your filtering needs.

Features

- Minimal Passband Insertion Loss
- 100 MHz BW
- 50 W CW RF Power Handling
- Bandpass Filtering
- C-Band Operation
- Small Form Factor
- Lightweight
- Rugged Chassis

Applications

- Amplifier Harmonic Filtering
- Military Communications
- Avionics
- Point-to-Point Communications
- Software Defined Radios (SDRs)
- RF Filtering
- Test and Measurement

132 Edison Drive, Middletown, OH 45044 | 513.360.0800 | sales@nuwaves.com | www.nuwaves.com

NuFilter™ 04BPCV-4019-SFSF-M01

Specifications

Absolute Maximums

Parameter	Rating	Unit
Max RF Input Power, CW, $Z_L = 50\ \Omega$	50	W
Max Operating Temperature	70	°C
Max Storage Temperature	85	°C

Export Classification
EAR99

Electrical Specifications @ 25 °C, Z_S=Z_L=50 Ω

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Operating Frequency	BW	3969		4069	MHz	
Passband Insertion Loss	IL		1.2	2.1	dB	3969 MHz
			0.6	1.1		4019 MHz
			1.2	2.1		4069 MHz
Rejection			-30		dB	3884 MHz
			-30			4154 MHz
Passband Flatness			0.6	1	dB	
VSWR	VSWR		1.2	*		Within Passband

*Maintains VSWR of ≤1.5 over 85% of Bandwidth

NuFilter™ 04BPCV-4019-SFSF-M01

Performance Plots

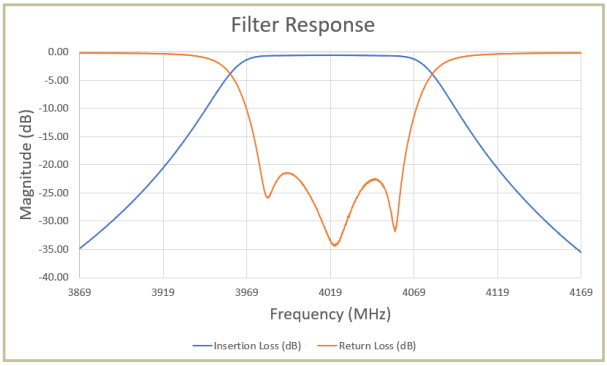

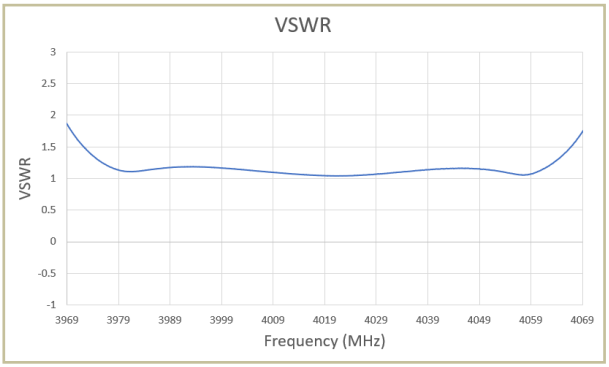

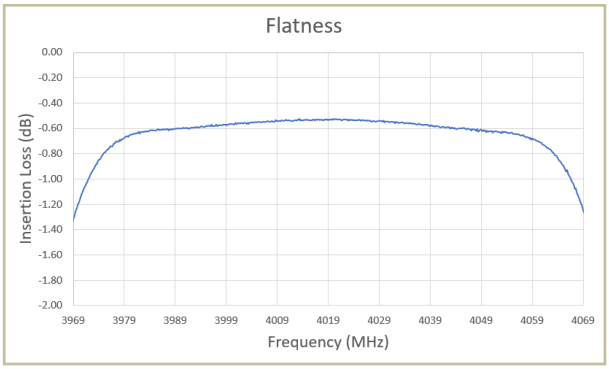

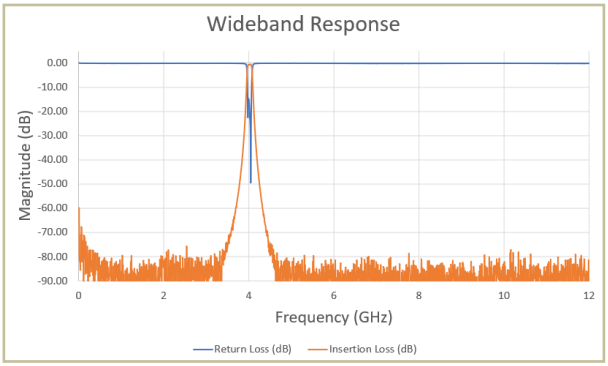

NuFilter™ 04BPCV-4019-SFSF-M01

Mechanical Specifications

Parameter	Value	Unit	Limits
Dimensions	2.48x 0.82 x 0.72	in	Max
Weight	TBD	oz	Max
RF Connectors, Input/Output	SMA Female		
Finish	Silver Plating		

Mechanical Outline

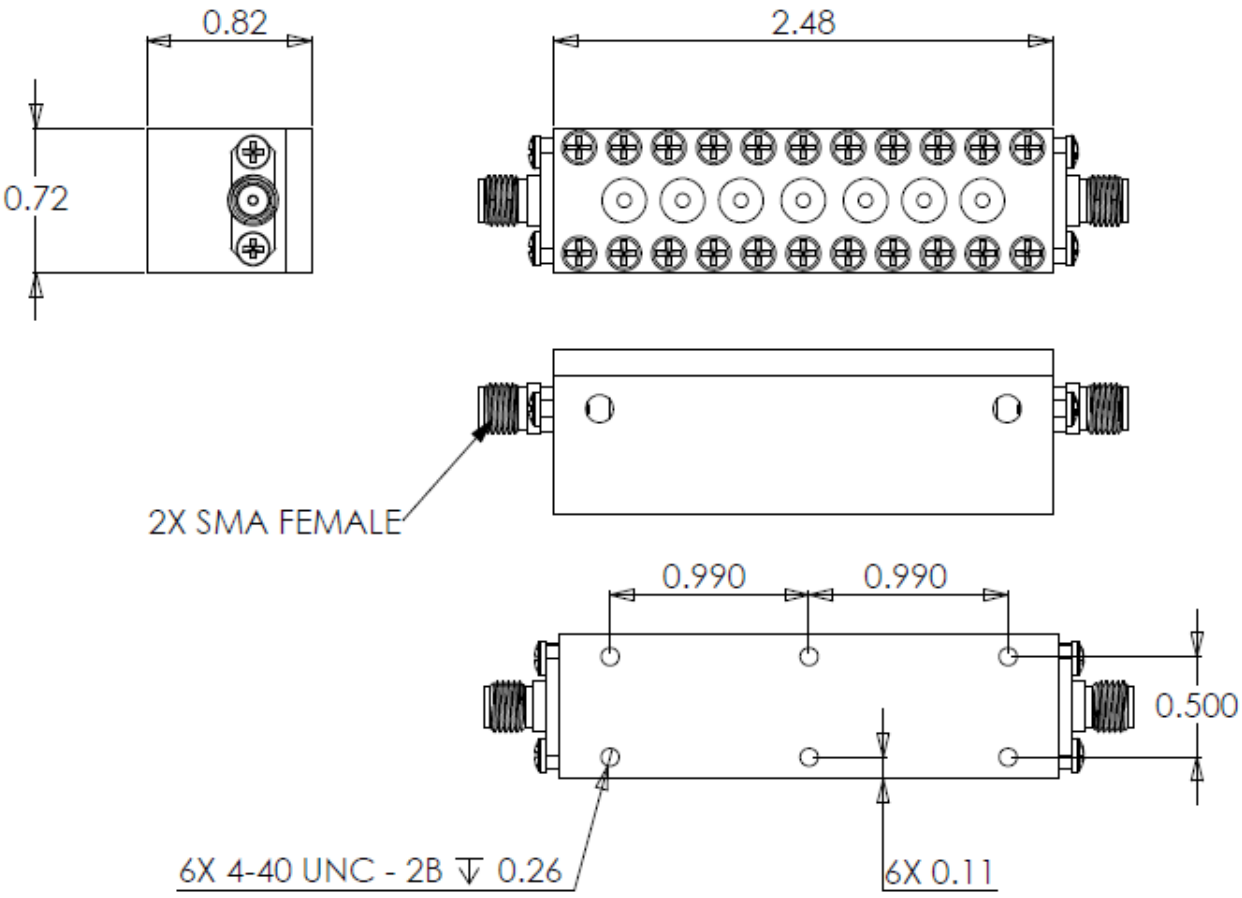

NuFilter™ 04BPCV-4019-SFSF-M01

Environmental Specifications

Parameter	Symbol	Min	Typ	Max	Unit
Operating Temperature	T_C	-40		+70	℃
Storage Temperature	T_{STG}	-40		+85	℃
Relative Humidity (non-condensing)	RH			95	%
Altitude MIL-STD-810F - Method 500.4	ALT			30,000	ft
Vibration / Shock Profile (Random profile in x,y, z axis, as per Figure for 15 minute duration in each axis)	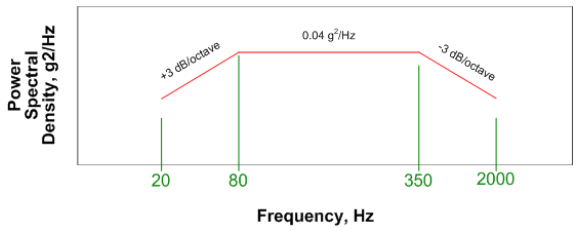				

Part Numbering Format

Part Number Example:

NW-FL-10BPCV-2450.5-SMSM-M01

Product Type	# of Poles	Filter Response	Filter Type	Center/Cutoff Frequency (MHz)	Cnctr #1 Type	Cnctr #1 Gender	Cnctr #2 Type	Cnctr #2 Gender	Configuration Number
NW-FL-	10	BP	CV	2450.5	S	M	S	F	-M01

Number of Poles: 01 to 12 (2 digits)

Filter Response:
- BP (Bandpass)
- LP (Lowpass)
- HP (Highpass)
- BR (Band Reject-Notch)

Filter Type:
- CV (Cavity)
- LE Lumped Element
- SL (Stripline)

Connector Type:
- S (SMA)
- B (BNC)
- T (TNC)

Connector Gender:
- M (Male)
- F (Female)

Configuration #: Mxx (defines additional mechanical & spec elements)

For information on product disposal (end-of-life), please refer to this document:
https://nuwaves.com/wp-content/uploads/Product-Disposal-End-of-Life.pdf

Contact NuWaves

NuWaves RF Solutions
132 Edison Drive
Middletown, OH 45044

www.nuwaves.com
sales@nuwaves.com
513.360.0800

NuWaves RF Solutions

Rev 122121 ©2021 NuWaves Ltd. Specifications subject to change without notice. Export of NuWaves Ltd. products are subject to U.S. export controls. U.S. export licenses may be required.