

NuWaves

RF Solutions

NuPower™ KU-20-C01-S01 Solid State Power Amplifier

20 Watts CW (min)
14.5 GHz to 15.5 GHz

P/N: NW-PA-KU-20-C01-S01

Custom options available; contact sales@nuwaves.com for more information



The NuPower™ KU-20-C01-S01 is a small connectorized solid state power amplifier that delivers over 20 watts of RF power to extend the operational range of data links and transmitters.

The NuPower KU-20-C01-S01 accepts a nominal +10 dBm RF input and provides 33 dB (min) of power gain from 14.5 GHz to 15.5 GHz for continuous wave (CW) and near-constant envelope waveforms. Based on the latest gallium nitride (GaN) technology, the power and form factor of the NuPower KU-20-C01-S01 make it ideal for size, weight, and power-constrained RF telemetry, tactical communication systems, and electronic warfare systems. NuPower PAs feature over-voltage protection and can operate over a wide temperature range of -40 °C to +85 °C (baseplate).

Extend your operational communication range with NuPower™ amplifiers from NuWaves RF Solutions.

Features

- 20 Watts RF Output Power (min)
- Small Form Factor
- Temp Fault Indicator
- Over/Under Voltage Protection
- Thermal Protection via Optional Fan-Cooled Heatsink

Benefits

- Extended Range
- Improved Link Margin
- Reduced load on DC power budget due to high efficiency operation
- Requires less volume on space-constrained platforms

Applications

- Unmanned Aircraft Systems (UAS)
Group 2 through Group 5
- Air Launch Effect (ALE)
- Common Launch Tube (CLT)
- Counter UAS Detection & Mitigation
- MIMO/MANET Radio Range Extension
- SISO Radio Range Extension
- CDL/BE-CDL Waveforms

NuPower™ KU-20-C01-S01 Power Amplifier

Specifications

Absolute Maximums

Parameter	Rating	Unit
Max Device Voltage	32	V
Max Device Current	7.5	A
Max RF Input Power, $Z_L = 50 \Omega$, CW	15	dBm
Max Operating Temperature (ambient)	50	°C
Max Operating Temperature (baseplate)	85	°C
Max Storage Temperature	85	°C

Export Classification
ECCN 3A001.B.2.B.2

Electrical Specifications @ 28 VDC, 25 °C, $Z_S=Z_L=50 \Omega$, CW, +10 dBm Input Power, Unless otherwise specified

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Operating Frequency	BW	14.5 ¹		15.5 ¹	GHz	
RF Output Power	P_{SAT}	43	44.5		dBm	
Output Power @ 1dB & 3dB Compression Points	P1dB/P3dB		28/39		dBm	14.5 GHz
			34/41			15.0 GHz
			30/38			15.5 GHz
Small Signal Gain	G		43.9		dB	14.5 GHz; Pin=-35 dBm
			42			15.0 GHz; Pin=-35 dBm
			47.4			15.5 GHz; Pin=-35 dBm
Power Gain Flatness	ΔG		± 0.3		dB	14.5 - 15.5 GHz
Small Signal Gain Flatness	ΔG		± 3		dB	14.5 - 15.5 GHz
Input VSWR	VSWR		3:1			
Nominal Input Drive Level	P_{IN}		+10		dBm	
Operating Voltage	VDC	24 ²	28	32	V	
Quiescent Current (RF Enable Off)	I_{DQ}		50		mA	
Quiescent Current (RF Enable On)	I_{DQ}		1.1		A	
Operating Current	I_{DD}		6.2		A	
Module Efficiency			15.4		%	
Switching Speed	$TX_{ON/OFF}$			2	μS	
Output Mismatch (No Damage)				10:1	Ψ	No Damage at All Phase Angles

¹ Capable of covering full CDL frequency band of 14.4 GHz to 15.35 GHz. Outputs 20W typical over 13-16 GHz. Consult factory if operating outside of specified bandwidth of 14.5-15.5 GHz. A band-specific isolator must be used internally to meet VSWR mismatch tolerance. Contact sales@nuwaves.com for more information.

² Capable of operating down to 16VDC with factory changes. Contact sales@nuwaves.com for wider voltage range.

NuPower™ KU-20-C01-S01 Power Amplifier

Specifications (cont.)

Mechanical Specifications

Parameter	Value	Unit	Limits
Dimensions	6.00 x 4.10 x 0.88	in	Max
Weight	20	oz	Max
RF Connectors, Input/Output	SMA Female		
Interface Connector	Micro-D, 9-pin Socket		
Cooling	Adequate Heatsink Required		

Environmental Specifications


Parameter	Symbol	Min	Typ	Max	Unit
Operating Temperature (ambient)	T _A	-40		+50	°C
Operating Temperature (baseplate)	T _C	-40		+85	°C
Storage Temperature	T _{STG}	-55		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Vibration / Shock Profile (Random profile in x,y, z axis, as per Figure for 15 minute duration in each axis)		<p>The graph shows a trapezoidal vibration profile. The y-axis is Power Spectral Density in g²/Hz, and the x-axis is Frequency in Hz. The profile starts at 20 Hz, rises with a slope of +3 dB/octave to 80 Hz, remains constant at 0.04 g²/Hz until 350 Hz, and then falls with a slope of -3 dB/octave to 2000 Hz.</p>			

NuPower™ KU-20-C01-S01 Power Amplifier


Performance Plots

Test Conditions: +28 VDC, +25 °C, $Z_S=Z_L=50 \Omega$


Output Power

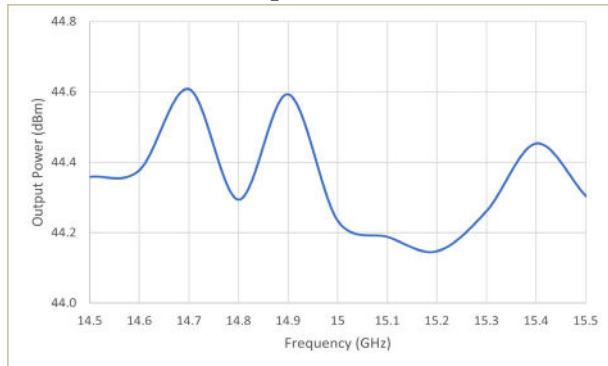


Output Power - Stepped Inputs

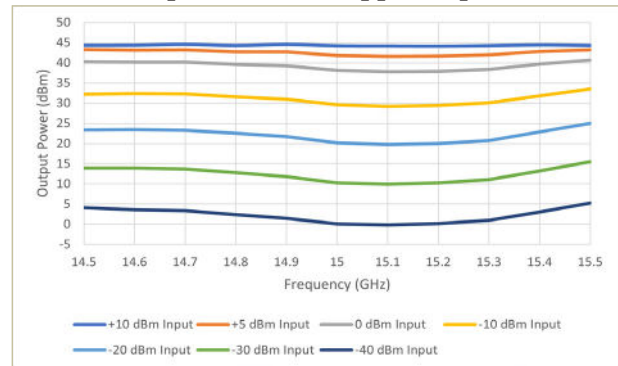


Output Power vs Temperature

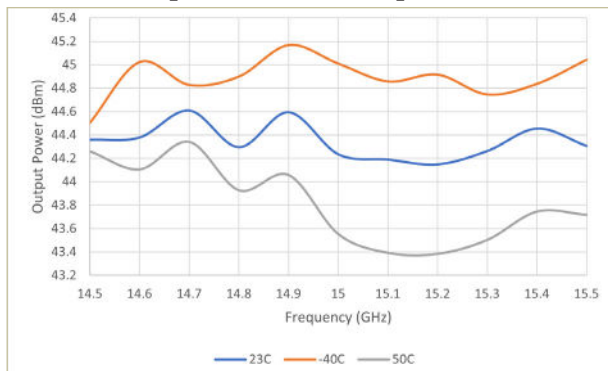


Output Power vs Input Power

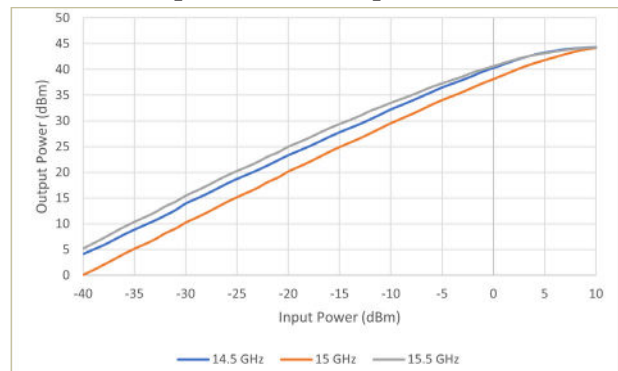


Gain vs Input Power

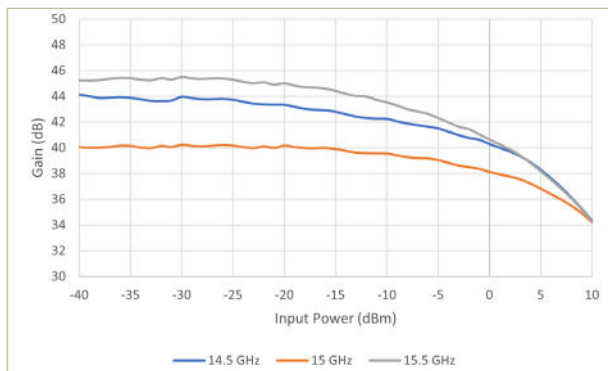


P1dB & P3dB

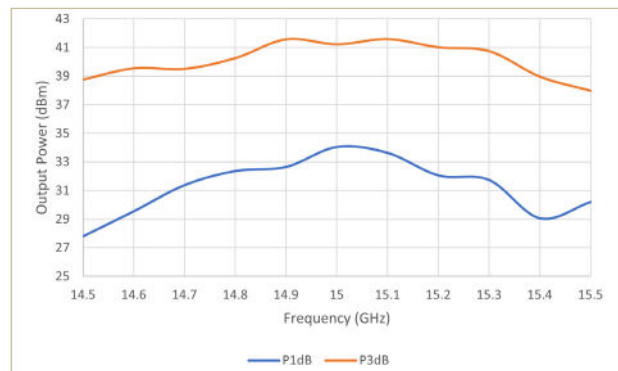

Efficiency

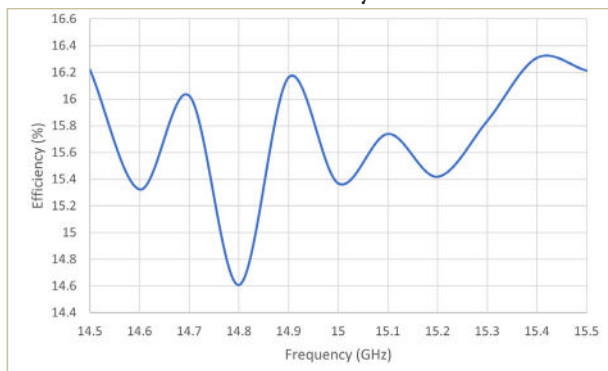



DC Current Consumption

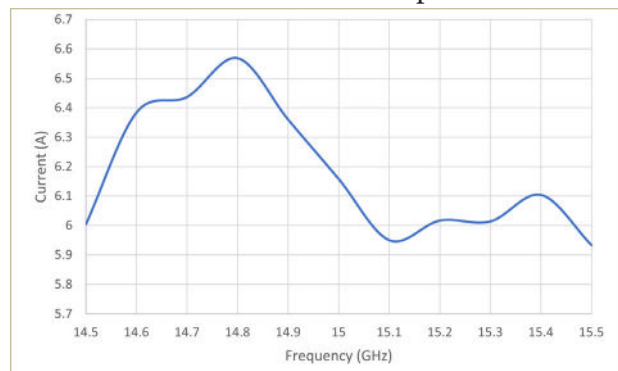

NuPower™ KU-20-C01-S01 Power Amplifier


Optional Heatsink Drawing

Heatsink and Integrated Fan: HTSK-07

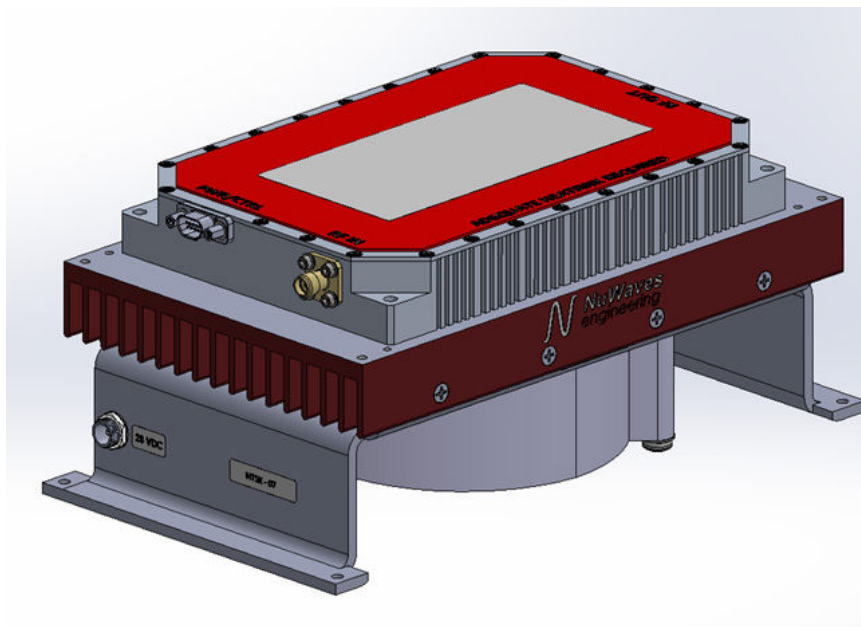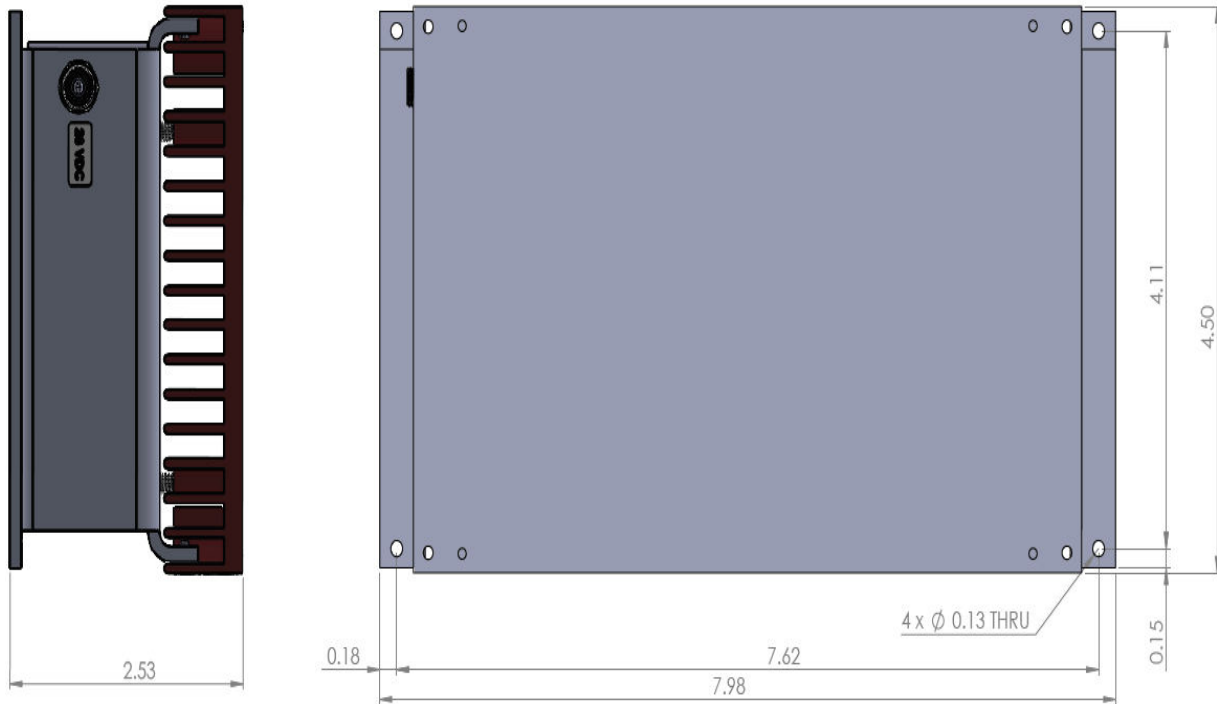

NuPower™ KU-20-C01-S01 Power Amplifier

Mechanical Outline

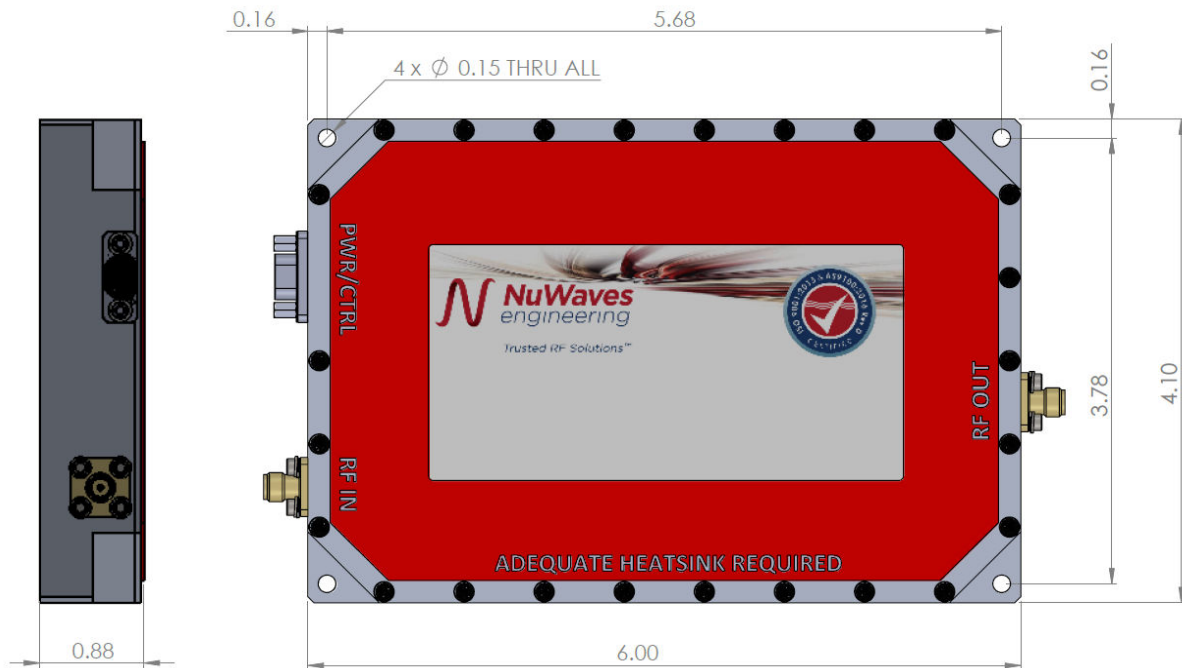

Accessory Part Numbers - Sold Separately

Pinout

Part Number	Description
NW-PA-ACC-CB09MC	Standard Interface Cable Assembly - Flying Leads
NW-PA-ACC-CT09MC	Upgraded Interface Cable Assembly - Banana Plug Termination
HTSK-07	Heatsink with Integrated Fan

Function	I/O	Pin	Logic Voltage
DC Power (+28 VDC)	I	3, 4, 5	–
Ground	I	1, 2, 6, 8	–
Over Temperature Flag [0V = temperature fault ; +5V = no fault]	O	7	5V Logic (CMOS) -0.5V to +1.5V = Logic LOW +3.5V to +5.5V = Logic HIGH
RF Enable ¹ [0V or GND = RF ON; +5V ¹ or NC = RF OFF]	I	9	5V Logic (CMOS) 0V to +1.35V = Logic LOW 3.15V to +5V = Logic HIGH

For information on product disposal (end-of-life), please refer to this document:
<https://nuwaves.com/wp-content/uploads/Product-Disposal-End-of-Life.pdf>

¹RF Enable is pulled high internally and does not require user to apply voltage to this line

Contact NuWaves



NuWaves RF Solutions
 132 Edison Drive
 Middletown, OH 45044

www.nuwaves.com
sales@nuwaves.com
 513.360.0800

