

NuWaves Engineering

Trusted RF Solutions.™

NuPower Xtender™ 12B04A-09 S-Band Bidirectional Amplifier

16 Watt CW

2.5 Watts Linear, 5% EVM @ 34 dBm

2.0 GHz - 2.5 GHz



P/N: NW-BA-12B04A-09

The NuPower Xtender™ Model NW-BA-12B04A-09 is a small, lightweight, and power-efficient bidirectional amplifier ideal for extending the communication range of half-duplex S-band transceivers running constant-envelope or near-constant-envelope waveforms. The bidirectional amplifier generates 16 Watts of RF power from 2000 to 2500 MHz in transmit mode and the integrated low-noise amplifier provides a minimum of 13 dB of gain in receive mode.

Based on the latest gallium nitride (GaN) technology, the Xtender offers greater than 30% power efficiency at most frequencies and its compact size makes it ideal for integration into space-constrained platforms. Accepting a +5 dBm RF input, the Xtender provides 35 dB of gain. The Xtender also features over-voltage and reverse-voltage protection and operates over a wide temperature range of -30 to +60 °C.

Extend your operational communication range with NuPower™ amplifiers from NuWaves Engineering.

Features

- 16 Watts RF Output Power
- 2.0 to 2.5 GHz
- Bidirectional Operation
- 35 dB of Transmit Gain
- 13 dB Gain LNA
- Fast T/R Mode Switching with Auto-Sensing or Manual T/R Line
- Small Form Factor
- High Efficiency GaN Technology
- Over-Voltage & Reverse-Voltage Protection

Applications

- Unmanned Aircraft Systems (UAS) - Group 2 and Group 3
- Unmanned Ground Vehicles (UGV)
- RF Communication Systems
- Software Defined Radios



NuPower Xtender™ 12B04A-09 BDA



Specifications

Operational

Frequency Range	2.0 GHz to 2.5 GHz
RF Output Power	16 W (typ) 11 W (min)
Transmit Gain	35 dB (typ)
2nd Harmonic	≤ -13 dBc
T/R Mode	Automatic Sensing or Manual T/R Line
T/R Switch Tlme	1.5 μs (max)
Receive RF Gain	13 dB (min)
Receive Noise Figure	3.5 dB (typ)
Nominal Input Drive Level	+5 dBm
Maximum Input Drive Level (no damage)	+10 dBm
Supply Voltage	+11 to +32 VDC
Transmit Current Consumption	2.3 A @ +28 VDC (typ)
Receive Current Consumption	100 mA @ +28 VDC (typ)
RF Connectors	SMA (female)
Interface Connector	9-pin Micro-D (socket)

Mechanical

Size	3.00" x 2.00" x 1.16" (L x W x H)
Weight	5.8 oz.


Environmental

Operating Temperature	-30 to +60 °C
Storage Temperature	-40 to +85 °C

Export

Classification	ITAR Controlled
----------------	-----------------

Mechanical Outline

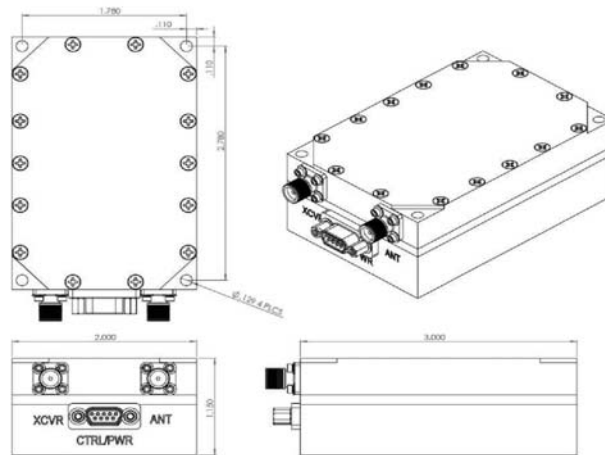

Contact NuWaves



NuWaves Engineering
132 Edison Drive
Middletown, OH 45044

www.nuwaves.com
product.sales@nuwaves.com
513.360.0800

NuWaves
Engineering
Trusted RF Solutions.™