



Trusted RF Solutions™

NuPower Xtender™ C15RX01-C044 C-Band Solid State Bidirectional Amplifier

15 Watts CW
5030 MHz - 5091 MHz



P/N: NW-BA-C-15-RX01-C044

The NuPower Xtender™ C15RX01-C044 is a small, highly efficient, solid state bidirectional amplifier (BDA) that provides 15 watts of RF power (3 W linear) across the 5030 to 5091 MHz frequency range to boost performance of data links and transmitters.

The NuPower Xtender C15RX01-C044 accepts a nominal 0 dBm (1mW) RF input and provides 40 dB of gain from 5030 to 5091 MHz for continuous wave (CW) and near-constant envelope waveforms.

Based on the latest gallium nitride (GaN) technology, the NuPower Xtender C15RX01-C044's power efficiency and form factor make it ideal for size, weight, and power-constrained broadband RF telemetry, tactical communication systems, and electronic warfare systems.

NuPower BDA's feature over-voltage protection and can operate over a wide temperature range of -40 °C to +85 °C (baseplate)

Extend your operational communication range with NuPower Xtender™ bidirectional amplifiers from NuWaves Engineering.

Features

- 15 Watts RF Output Power
- 5030 to 5091 MHz
- Bidirectional Operation
- 40 dB of Transmit Gain
- 7.5 dB of Receive Gain
- Miniature Package
- Manual T/R Control
- Single Power Supply
- Over-Voltage Protection
- 3.3 V or 5 V Logic Control
- Common Tx/Rx Port

Benefits

- Extended Range
- Improved Link Margin
- Lessened load on DC power budget due to high efficiency operation
- Consumes less volume on space-constrained platforms

Applications

- Unmanned Aircraft Systems (UAS), Group 2 & 3
- Unmanned Ground Vehicles (UGV)
- RF Telemetry
- RF Communication Systems
- Software Defined Radios

NuPower™ Xtender C15RX01-C044 BDA

Specifications

Absolute Maximums

Parameter	Rating	Unit
Max Device Voltage	32	V
Max Device Current @ 28 VDC	7	A
Max RF Input Power @ ANT Port, $Z_L = 50 \Omega$	+5	dBm
Max RF Input Power @ XCVR Port, $Z_L = 50 \Omega$	+15	dBm
Max Operating Temperature (ambient)	60	°C
Max Operating Temperature (baseplate)	85	°C
Max Storage Temperature	100	°C

Export Classification
EAR99

Electrical Specifications - Operational @ 28 VDC, 25 °C, $Z_S=Z_L=50 \Omega$

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Operating Frequency	BW	5030		5091	MHz	
Switching Speed	$T_{XON/OFF}$		2		μ S	10% to 90%
Operating Voltage	VDC	27	28	32	V	
Operating Current - Transmit	I_{DD}		4.6		A	CW, +28 Vin, Pin = 0 dBm
Operating Current - Receive	I_{DD}		0.3		A	Receive Mode
Quiescent Current	I_{DQ}		950		mA	No RF Signal Applied, Transmit Mode
Module Efficiency			20		%	CW, Pin = 0 dBm, Transmit mode

Electrical Specifications - Transmit @ 28 VDC, 25 °C, $Z_S=Z_L=50 \Omega$

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Operating Frequency	BW	5030		5091	MHz	
RF Output Power	P_{SAT}		15		W	Pin = 0 dBm
Small Signal Gain	G		48		dB	Pin = -30 dBm
Small Signal Gain Flatness	ΔG		1		dB	Pin = -30 dBm
Input VSWR	VSWR		2:1			
Output Mismatch (No Damage)	VSWR			10:1		
Nominal Input Drive Level	P_{IN}		0		dBm	
Operating Voltage	VDC	27	28	32	V	
Quiescent Current (Transmit Mode)	I_{DQ}		0.95		A	No RF Signal Applied
Operating Current	I_{DD}		4.6		A	Pin = 0 dBm
Module Efficiency			20		%	
Switching Speed	$T_{XON/OFF}$		2		μ S	10% to 90%
Third Order Intercept Point	OIP3		40		dBm	Two tone test @ 1 MHz spacing $P_{out} = 2W$
Harmonics	2nd			-25	dBc	
	3rd			-25	dBc	

NuPower™ Xtender C15RX01-C044 BDA

Specifications (cont.)

Electrical Specifications - Receive @ 28 VDC, 25 °C, $Z_S=Z_L=50 \Omega$


Parameter	Symbol	Min	Typ	Max	Unit
Receive P1dB	P1dB		+18		dBm
Receive Gain	G		7.5		dB
Receive Gain Flatness	ΔG		± 1		dB
Receive Current	I_{RX}		300		mA
Receive Noise Figure	NF		3.5		dB

Mechanical Specifications

Parameter	Value	Unit	Limits
Dimensions	5.50 x 4.25 x 0.68	in	Max
Weight	10.5	oz	
RF Connectors, Input/Output	SMA Female		
Interface Connector	Micro-D, 9-pin Socket		
Cooling	Adequate Heatsink Required		


Environmental Specifications

Parameter	Symbol	Min	Typ	Max	Unit
Operating Temperature (ambient)	T_A	-40		+60	°C
Operating Temperature (baseplate)	T_C	-40		+85	°C
Storage Temperature	T_{STG}	-55		+100	°C
Relative Humidity (non-condensing)	RH			95	%
Altitude MIL-STD-810F - Method 500.4	ALT			30,000	ft
Vibration / Shock Profile (Random profile in x,y, z axis, as per Figure for 15 minute duration in each axis)					

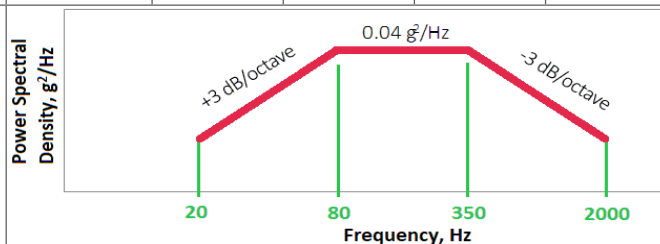

NuPower™ Xtender C15RX01-C044 BDA

Mechanical Outline

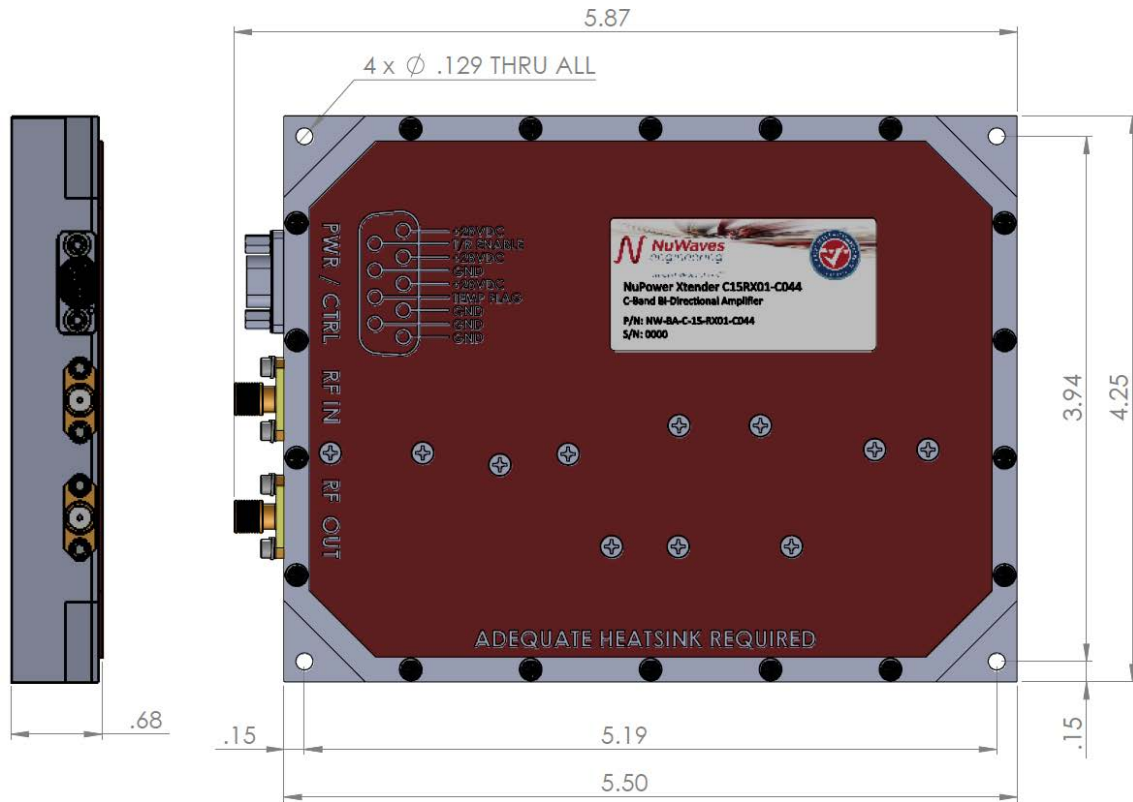

Accessory Part Numbers

Part Number	Description
NW-BA-ACC-CB09MC	Standard Interface Cable Assembly - Flying Leads (not included with module)
NW-BA-ACC-CT09MC	Upgraded Interface Cable Assembly - Banana Plug Termination
NW-BA-ACC-KT03	Accessory Kit, which includes Fan-Cooled Heatsink and Upgraded Interface Cable

For information on product disposal (end-of-life), please refer to this document:
<https://nuwaves.com/wp-content/uploads/Product-Disposal-End-of-Life.pdf>

Pinout

Function	I/O	Pin
DC Power (+28 Volts)	I	3, 4, 5
Ground	I	1, 2, 6, 8
Over Temperature Flag (0 Volts = Temperature Fault) (+5 Volts = No Fault)	O	7
TR Control (3.3 V OR 5 V Logic) Manual Mode Autosense Mode	I O	9

*T/R Control is configured at the factory for Manual Mode or Autosense Mode

*Autosense Mode

Tx @ RF input ≥ 0 dBm

Rx @ RF input ≤ -10 dBm

Contact NuWaves



NuWaves Engineering
 132 Edison Drive
 Middletown, OH 45044

www.nuwaves.com
sales@nuwaves.com
 513.360.0800



Trusted RF Solutions™